

电磁阀

产品选型手册

THE ELECTROMAGNETIC VALVE
SELECTION GUIDE

专业洁具电磁阀领导者

Professional sanitary ware solenoid valve leader

电磁阀，从此改变了洁具的历史，核心技术，
兴丰掌握。让世界爱上中国制造！



智能马桶电磁阀系列

暗装小冲脉冲阀/小冲一体化脉冲阀系列

陶瓷一体化脉冲阀系列

大冲脉冲阀系列

龙头脉冲阀系列

线圈系列



精于心 简于形

SENSE AND SIMPLICITY

公司简介 Company Profile

乐清市兴丰电子厂成立于2002年，专业生产制造智能洁具电磁阀的科技型企业。为家用电器、感应洁具、智能卫浴，自动控制行业配套。工厂位于乐清市虹桥信岙工业区，拥有完善的研发，制造，营销和物流管理系统。

兴丰一直奉行并努力走技术革新，依靠规模 and 专业化品牌服务至上，不断做大做强。产品主要分为：感应系列、智能马桶系列、灌溉阀系列等智能系列卫浴配套的电磁阀。

兴丰电子通过不断努力、创新、力争行业内一流企业，让每一个使用兴丰产品的客户满意，是我们永不停止的追求目标。

Yue Xingfeng Electronics Factory is a 2002 years intelligent sanitary ware manufacturing electromagnetic valve of mediumsized enterprises. Professional sanitary ware for household electrical appliances, induction sanitary ware, intelligence, form a complete set of automatic control industry. Factory is located in yueqing city east industrial zone, with perfect r&d, manufacturing, marketing and logistics management system.

Xing feng and insist on techonological innovation has been followed, relying on the scale and professional brand service, constantly bigger and stronger. Products are mainly dicided into: induction series, intelligent toilet series intelligent wei yu of form a complete set of solenoid valve. The material is divided into brass, plastic series.

Xing feng electronic through continuous efforts, innovation, and strive to industry leading enterprises, let each use of establishing product satisfaction, is our never—ending pursuit of goals.

Enterprise Honor

企业荣誉

创造卓越品质、追求顾客满意

兴丰电子坚持以“创造卓越品质、追求顾客满意”的质量方针。坚持“以科技为先导、以节能为目标、以创新为追逐、以质量为生命、以服务为宗旨”的经营理念。



Xingfeng Electronics adhere to the “create excellent quality, the pursuit of customer satisfaction,” the quality policy. Adhere to the “science and technology as a precursor to energy conservation as the goal, to innovation for the chase to the quality of life and service for the purpose of” business philosophy.



XFFZ[®] <http://www.yqxf.cc>
Xingfeng Electronics Factory
品质第一，客户至上，相辅相成，携手共赢

兴丰荣耀2023年 一直创造纪录 走在行业前方

电磁阀，从此改变了洁具的历史，核心技术，兴丰掌握。让世界爱上中国制造！



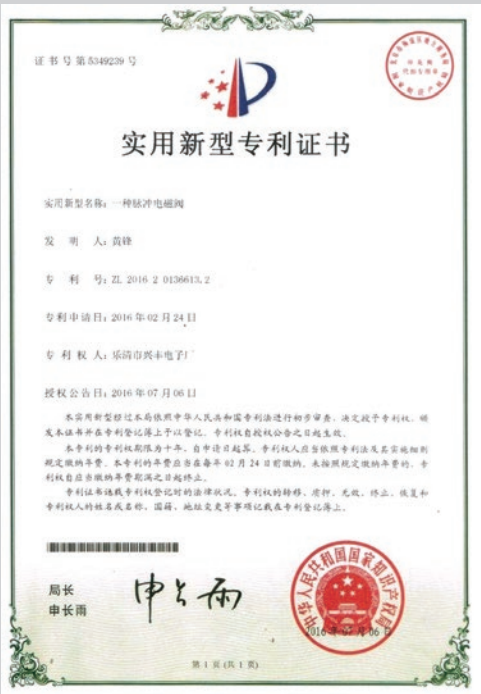
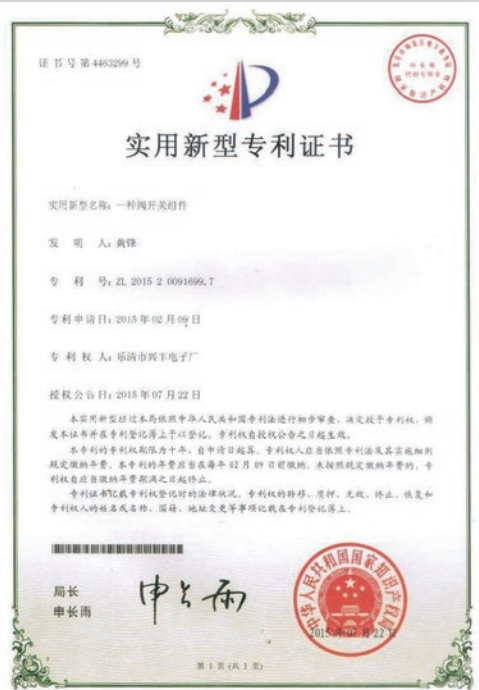


Application Domain

应用领域

360° 安全无忧
用的放心 是我的硬性指标


- ✓ 杂质自清
- ✓ 防堵性能
- ✓ 红外线感应
- ✓ 寿命长
- ✓ 节水环保

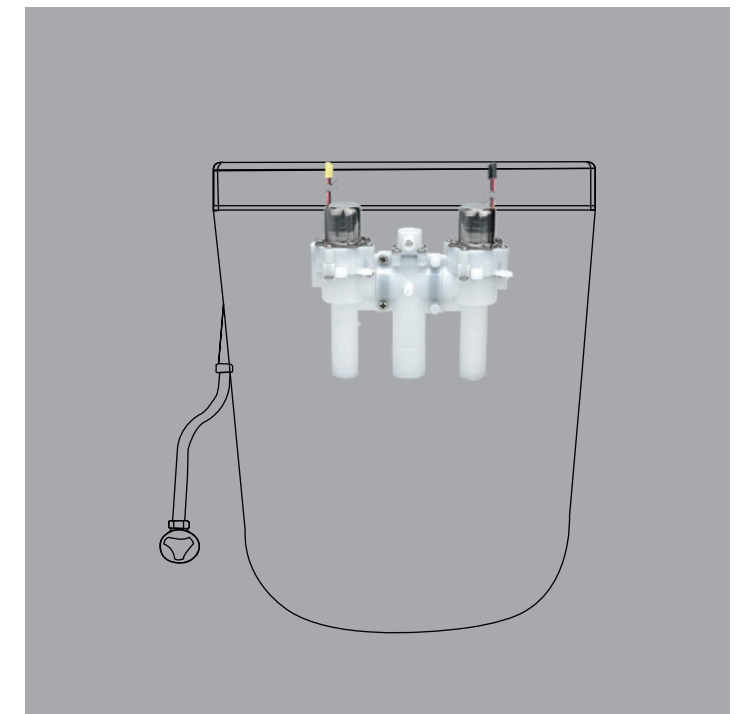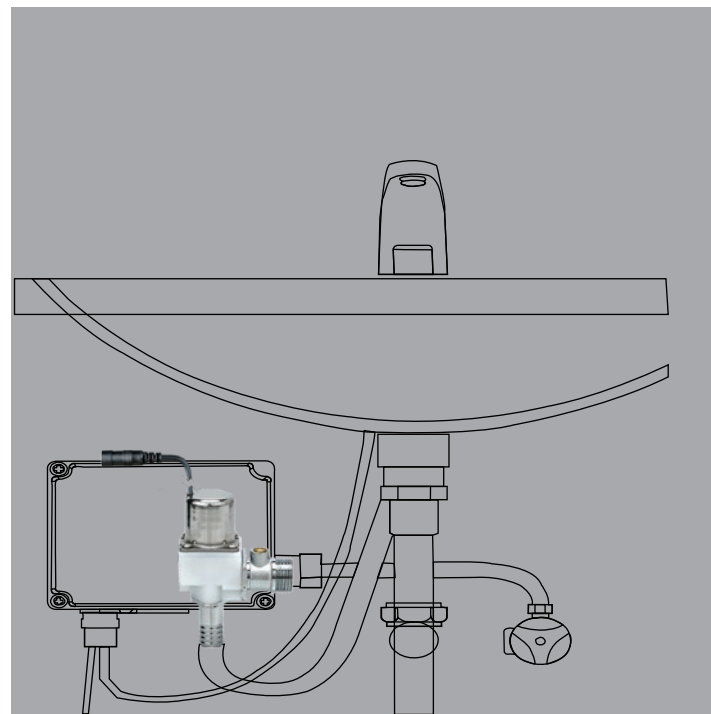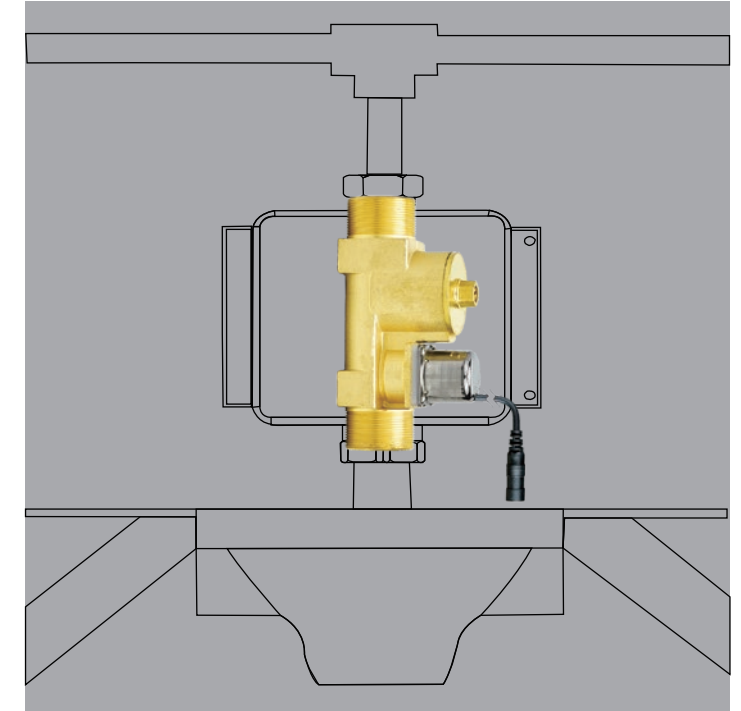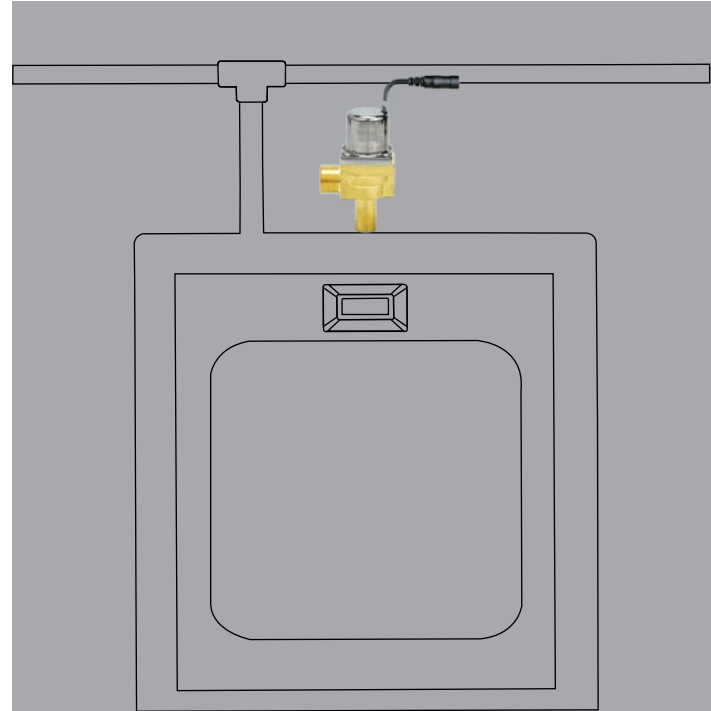


Products contents

产品目录
乐清市兴丰电子厂
Yueqing
Xingfeng
Electronics factory

智能马桶电磁阀系列

	ZNF-A 智能马桶电磁阀 Page 03		ZNF-A1 智能马桶电磁阀 Page 04
	ZNF-B 智能马桶电磁阀 Page 05		ZNF-C 智能马桶电磁阀 Page 06
	ZNF-D 智能马桶电磁阀 Page 07		ZNF-E 智能马桶电磁阀 Page 08
	ZNF-F 智能马桶电磁阀 Page 09		ZNF-G 智能马桶电磁阀 Page 10

龙头脉冲阀系列

	LTF-A(白) 龙头脉冲阀 Page 13		LTF-A(黑) 龙头脉冲阀 Page 14
	LTF-B 龙头脉冲阀 Page 15		LTF-C 龙头脉冲阀 Page 16
	LTF-D 龙头脉冲阀 Page 17		LTF-E 龙头脉冲阀 Page 18
	LTF-F 龙头脉冲阀 Page 19		

暗装小冲脉冲阀/小冲一体化脉冲阀系列

	XCF-A 小冲阀 Page 22		XCF-B180 小冲阀 Page 23
	XCF-C180 小冲阀 Page 24		XCF-D90 小冲阀 Page 25
	XCF-E180 小冲阀 Page 26		XCF-F180 小冲阀 Page 27
	XCF-G180 小冲阀 Page 28		XCF-H 小冲阀 Page 29
	XCF-I180 小冲阀 Page 30		XCF-J 小冲阀 Page 31
	XCF-K 一体化冲阀 Page 32		XCF-L 一体化冲阀 Page 33


暗装小冲脉冲阀/小冲一体化脉冲阀系列

	YTH-A180 一体化冲阀 Page 34		YTH-B180 一体化冲阀 Page 35
	YTH-C 一体化冲阀 Page 36		YTH-D180 一体化冲阀 Page 37

陶瓷一体化脉冲阀系列

	TCF-A 陶瓷冲阀 Page 40		TCF-B 陶瓷冲阀 Page 41
	TCF-C 陶瓷冲阀 Page 42		TCF-D 陶瓷冲阀 Page 43
	TCF-E 陶瓷冲阀 Page 44		TCF-F 陶瓷冲阀 Page 45
	TCF-G 陶瓷冲阀 Page 46		TCF-H 陶瓷冲阀 Page 47



大冲脉冲阀系列

	DCF-A 大冲阀 Page 50		DCF-B 大冲阀 Page 51
	DCF-C 大冲阀 Page 52		DCF-D 大冲阀 Page 53
	DCF-E 大冲阀 Page 54		DCF-F 大冲阀 Page 55
	DCF-G 大冲阀 Page 56		DCF-H 大冲阀 Page 57
			DCF-HS 大冲阀 Page 58

线圈

	XQ-18 线圈 Page 59		XQ-20A 线圈 Page 59
	XQ-20B 线圈 Page 59		XQ-21 线圈 Page 60
	XQ-26 线圈 Page 60		XQ-30 线圈 Page 60

配件

	CK-A 配件 Page 61
	CK-B 配件 Page 61
	CK-C 配件 Page 61

360° 安全无忧

用的放心
是我的硬性指标

✓杂质自清 ✓防堵性能 ✓红外线感应 ✓寿命长 ✓节水环保



综合概述

应用于自动控制系统中:流体开关控制，内部利用两个型腔进行减压控制，增强了阀的可靠性和使用寿命，缩短了最高最低压力下阀开关所需的脉冲宽度，独特的杂质自清功能，使其具有优越的防堵性能。采用一进二出的形式，完成冲洗、虹吸、清洗等多项功能。产品的紧固件均采用螺母，螺栓紧固大大增加了产品的强度和寿命。

Summary

Switch used in the automatic control system, fluid control,the internal uses of two cavity pressure control, enhanced the reliability of the valve and service life, reduces the maximum and minimum pressure valve switch is needed for the pulse width, the unique impurities self-cleaning function,make it has held in superior performance. Take the form of one and two,complete the washing,siphon, cleaning and other functions. the fasteners of the products have unts, and the fastening of bolts greatly increases the strength and longevity of the product.

智能马桶电磁阀系列
Intelligent toilet solenoid valve series



智能马桶电磁阀系列


Intelligent toilet solenoid valve series

技术指标参数 Technical Feature & Parameter

★ 使用说明 Instruction

额定脉冲电压 Rated voltage	DC 9V
线圈电阻 Coil resistance	20 Ω ± 0.5 Ω (20℃)
最低电流 Min Current	320mA
脉冲宽度 Pulse width	30–50ms
工作压力 Operating pressure	0.02Mpa~0.8Mpa
介质温度 Media temperature	1℃~75℃
响应时间 Responding time	开 ≤ 0.15s关 ≤ 0.5s open ≤ 0.15s close ≤ 0.5s

★ 压力与流量的关系 Relation between pressure and flow rate

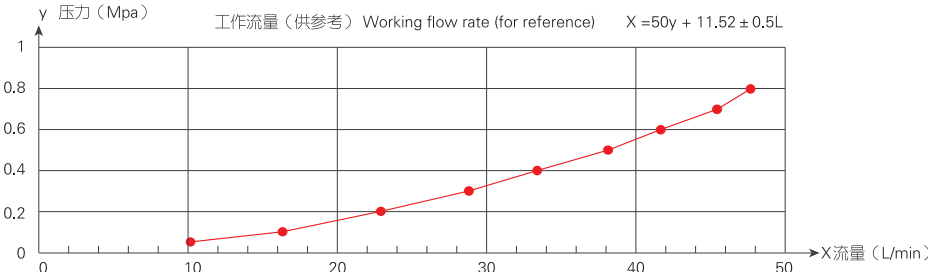

压力(MPa) Pressure (MPa)	0.05	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
流量平均值(KG/min) Average flow rare(KG/min)	10.6	16.5	23.1	29.1	33.6	38.4	42	45.6	48

★ 性能试验 Performance test

强度试验 The strength test	静压1 .6MPa Static pressure		耐水压Withstand voltage pressure		1.2Mpa/5min
空载测试 No-load test	电压9V Voltage 9V		允许限压(电压) Permissible limiting voltage		V*1.15
高水压启动与关闭 High water pressure startup and closing	水压0.8Mpa，电压9V，电磁阀能正常启动与关闭 At water pressure 0.8Mpa, voltage 9V, the solenoid valve can be started and closed normally				
低水压启动与关闭 Low water pressure startup and closing	水压0.02Mpa，电压6~9V，电磁阀能正常启动与关闭 At water pressure 0.02Mpa, voltage V9, the solenoid valve can be started and closed normally				
高水压泄漏量 Leakage upon high water pressure	1.2Mpa 无泄漏 zero leakage				
低水压泄漏量 Leakage upon low water pressure	0.02Mpa泄漏量≤0.1mL/min 0.02Mpa leakage ≤0.1 mL/min				
电气强度 Electric strength	导电部分与安装孔及非导电盒属之间应能承受150v/50Hz，漏电流0.75mA，1 min耐压而无击穿现象 Among the conductive part,mounting hole and nonconductive metal,it can withstand 1500V/50Hz leakage current 0.75mA for 1 min without the breakdown				
绝缘电阻 Insulation resistance	用500V兆欧表测试导电部分与非导电金属之间的电阻≥100MΩ The resistance between the charged part and nonconductive metallic part tested by the megohmmeter of 500V≥100MΩ				
密封试验 Sealing test	Static pressure 静压	空气 Air	高压 High pressure	1 MPa	
			低压 Low pressure	0.02 MPa	
		冷水 Cold water	高压 High pressure	1.2 MPa	
			低压 Low pressure	0.02 MPa	
		热水 Hot water	高压 High pressure	0.8 MPa	
			低压 Low pressure	0.02 MPa	
使用寿命试验 Service life	≥Min 1,000,000 cycles (CJ/T194—2004) ≥1,000,000 周期; 符合CJ/T194—2004要求				

★ 工作环境要求 Requirements of working environment

工作环境温度 Temp.of working envlron mlent	1℃~+60℃	允许限压（水压） Permissible limiting pressure (water pressure)	≤ 1.2Mpa
工作环境湿度 Humidity of working environment	35%~90%RH(无结露状态) 35%~90%RH(No condensation state)	安装方向 Mounting direction	垂直方向，倾斜度不超过60度 It is mounted in vertical direction , the inclination doesn't exceed 60 degrees
保存温度 Storage temp	–5~ +80℃ (无结冰状态) –5~ +80℃ (No freezing state)		
保存湿度 Storage humidity	25%~95%RH(无结露状态) 25%~95%RH(No condensation state)		

- ☑ 杂质自清
- ☑ 防堵性能
- ☑ 寿命长
- ☑ 红外线感应
- ☑ 节水环保



Model: ZNF–A



零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4–M4	Screw 4–M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	阀体组件	Body components





inlet（进水口）


订货须知

- 用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号：ZNF–A/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：ZNF–A；②电压：DC6V；③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
- 如用户有特殊要求，请在订购时详细指明。

外形尺寸图 Size of installation

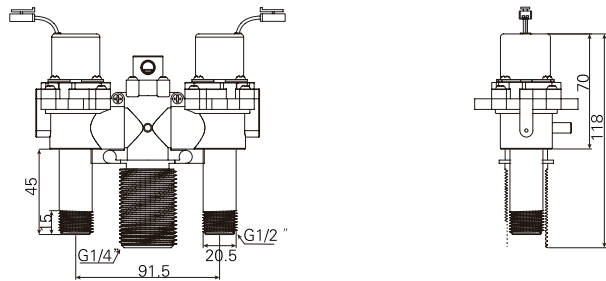

产品分解图 Stucture Diagram

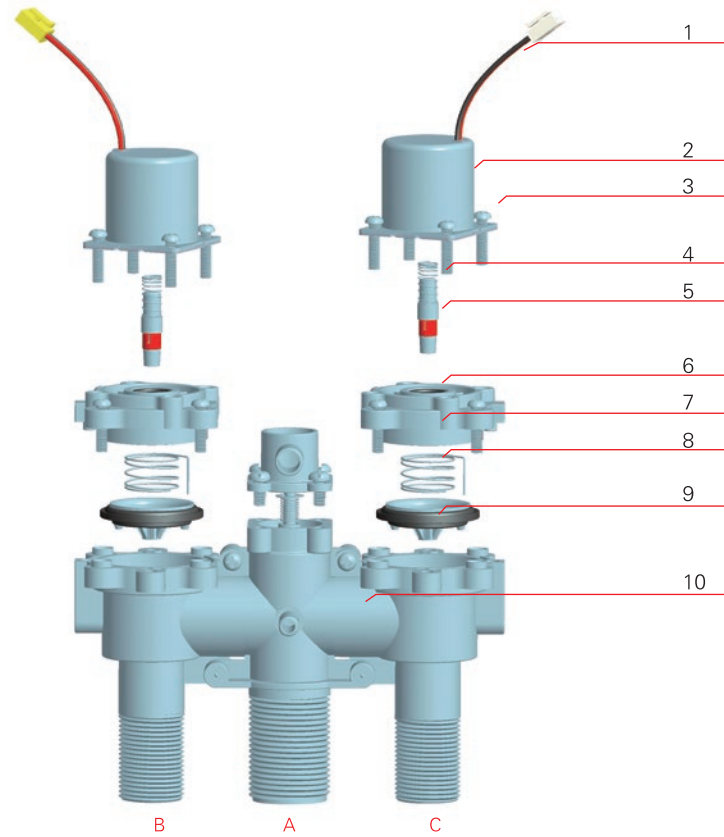


Note

When ordering, please specify the specifications and quantity of the required product according to the “model meaning” .
Type: znf–a/DC 6V DC pulse type two–core waterproof wire A.
This model has the following meanings: the type: ZNF– A; Voltage: DC6V; Switch type: dc pulse type; The type of line: type: two–core waterproof line A; If the user has special request, please specify in detail when ordering.




智能马桶电磁阀系列
Intelligent toilet solenoid valve series

Model: ZNF-A1

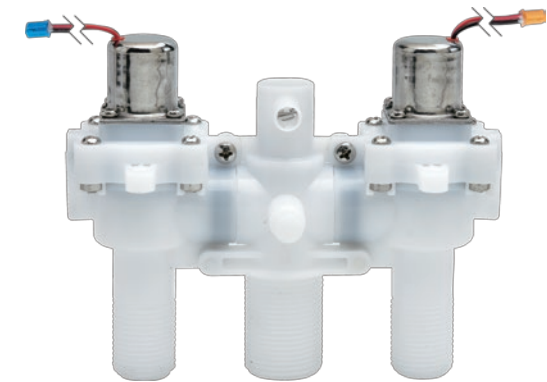


外形尺寸图 Size of installation

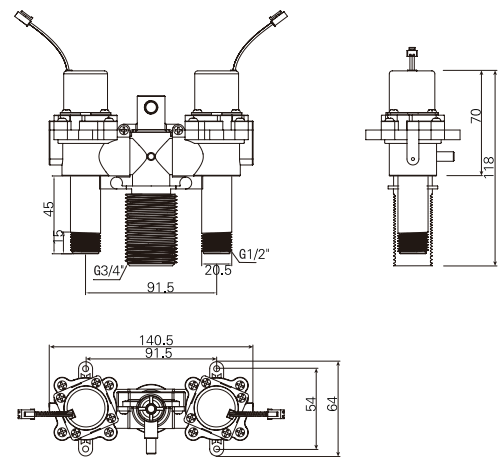

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	阀体组件	Body components

产品分解图 Stucture Diagram

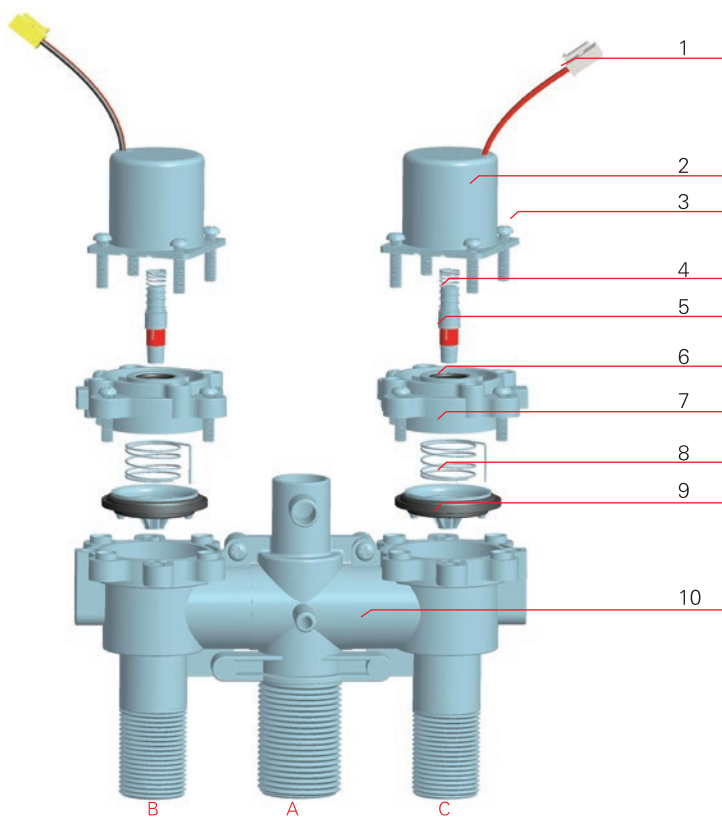

inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号：ZNF-A/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：ZNF-A；②电压：DC6V；③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: znf-a/DC 6V DC pulse type two-core waterproof wire A.
This model has the following meanings: the type: ZNF-A; Voltage: DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.




- ☑ 杂质自清
- ☑ 防堵性能
- ☑ 寿命长
- ☑ 红外线感应
- ☑ 节水环保



Model: ZNF-B




外形尺寸图 Size of installation

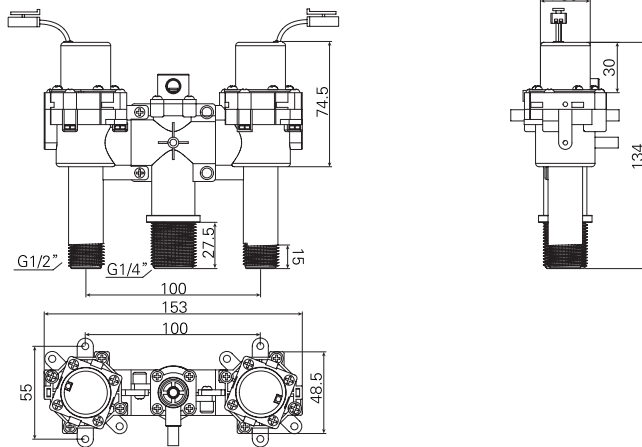

零部件名称 Accessories

序号 NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	自动解压组件	Automatic decompression components
11	阀体组件	Body components

产品分解图 Stucture Diagram

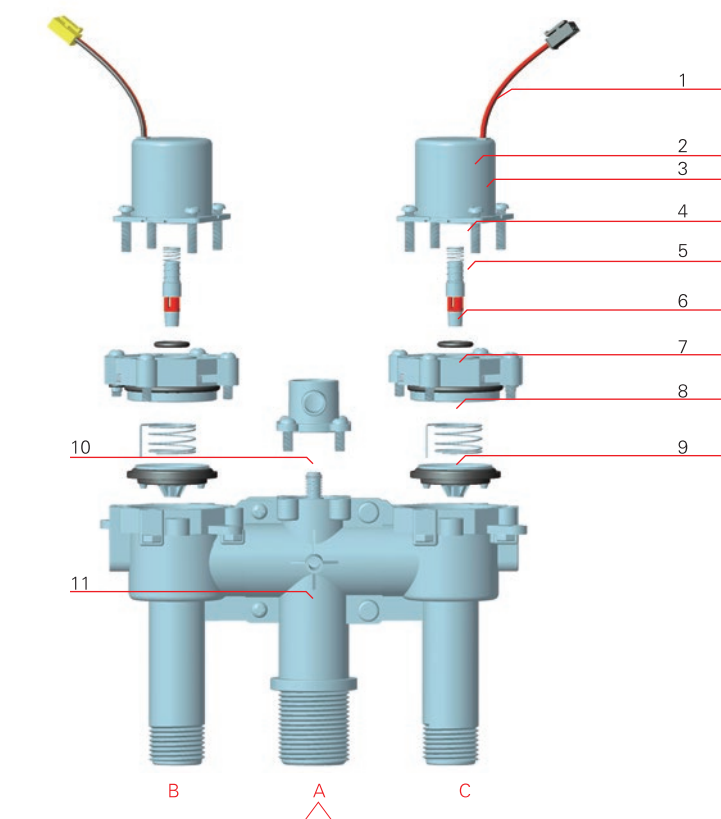

inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号：ZNF-B/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：ZNF-B；②电压：DC6V；③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note


When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: znf-b/DC 6V DC pulse type two-core waterproof wire A.
This model has the following meanings: the type: ZNF-B; Voltage: DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



Model: ZNF-C




外形尺寸图 Size of installation

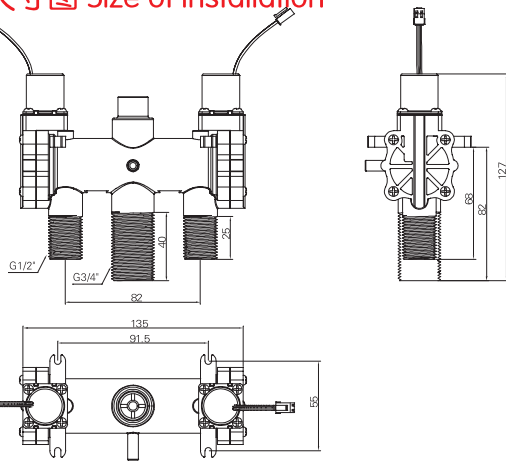

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	阀体组件	Body components

产品分解图 Stucture Diagram

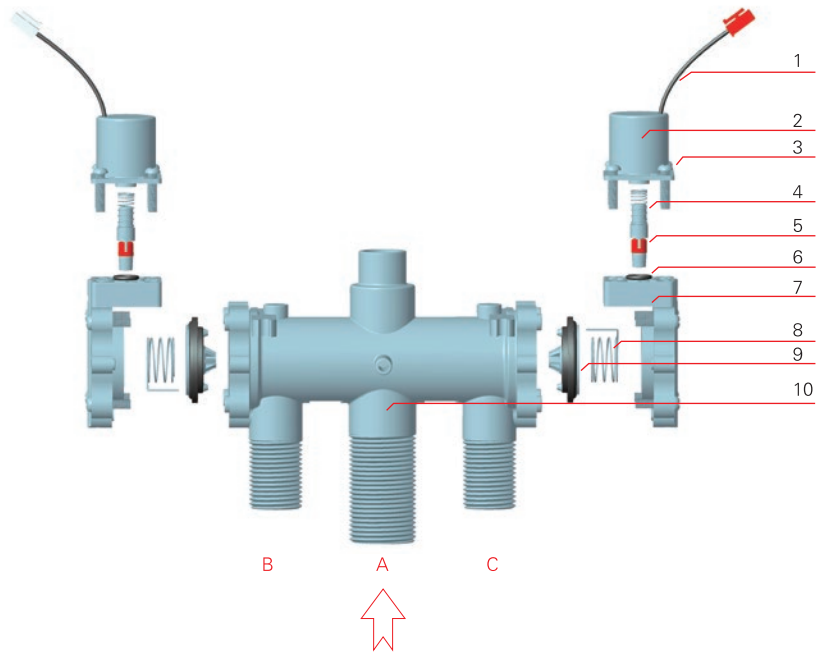

inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号：ZNF-C/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：ZNF-C；②电压：DC6V；
③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the required product according to the “model meaning” .
Type: znf-c/DC 6V DC pulse type two-core waterproof wire A.
This model has the following meanings: the type: ZNF- C; Voltage: DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.




- ☑ 杂质自清
- ☑ 防堵性能
- ☑ 寿命长
- ☑ 红外线感应
- ☑ 节水环保

Model: ZNF-D





外形尺寸图 Size of installation

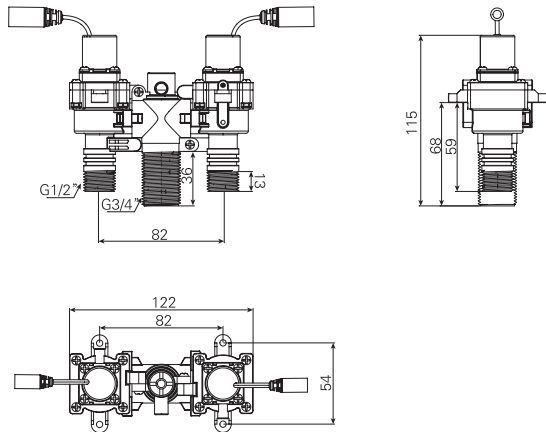

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	阀体组件	Body components

产品分解图 Stucture Diagram

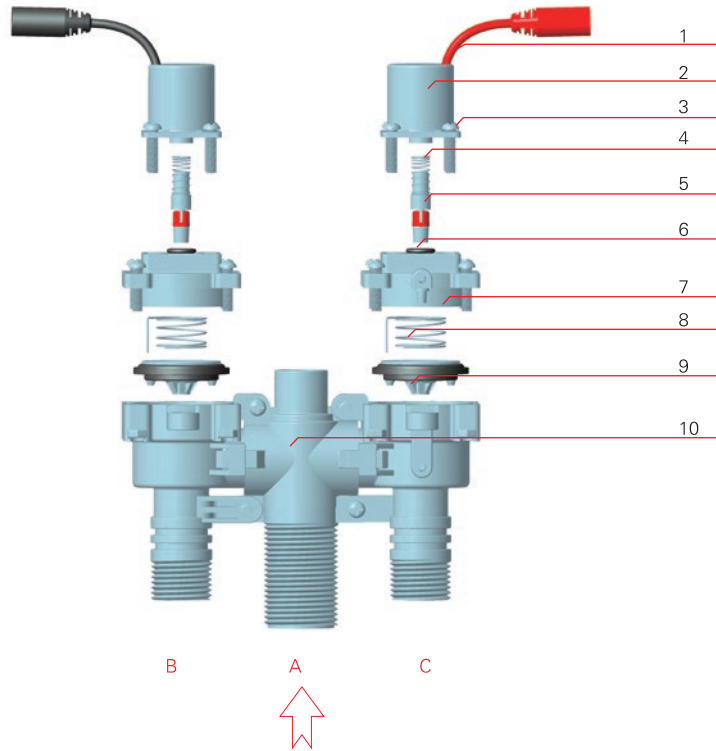

inlet (进水口)

订货须知


1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号：ZNF-D/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：ZNF-D；②电压：DC6V；
③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note


When ordering, please specify the specifications and quantity of the required product according to the “model meaning” .
Type: znf-d/DC 6V DC pulse type two-core waterproof wire A.
This model has the following meanings: the type: ZNF- D; Voltage: DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



Model: ZNF-E

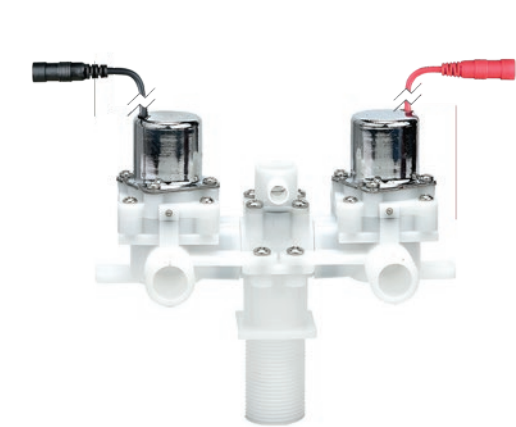


外形尺寸图 Size of installation

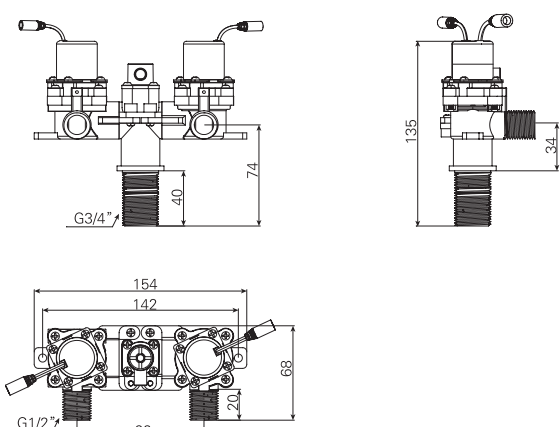

零部件名称 Accessories

序号 NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	自动解压组件	Automatic decompression components
11	阀体组件	Body components

产品分解图 Stucture Diagram

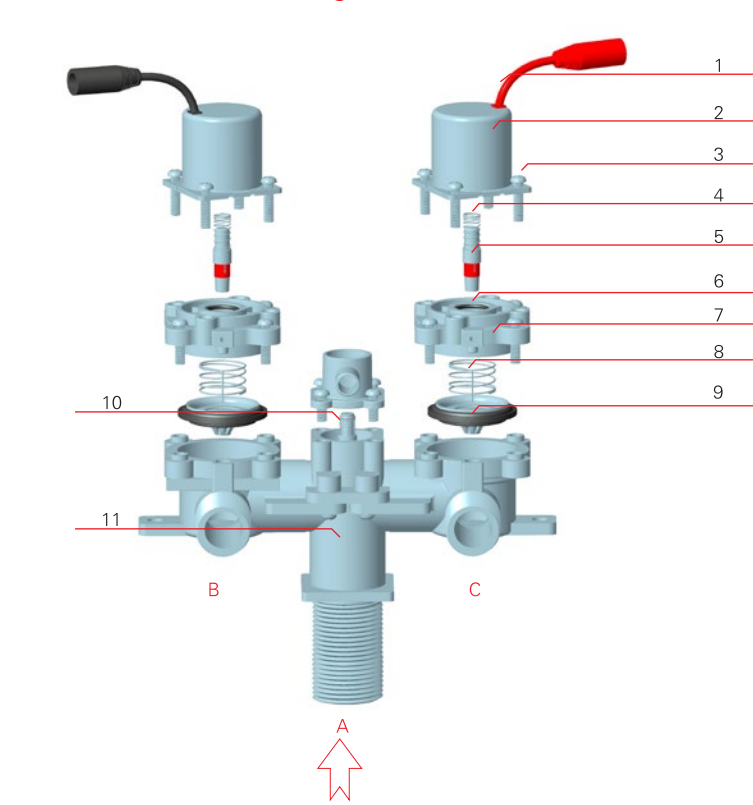


inlet (进水口)

订货须知


1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号：ZNF-E/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：ZNF-E；②电压：DC6V；③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the required product according to the “model meaning” .
Type: znf-e/DC 6V DC pulse type two-core waterproof wire A.
This model has the following meanings: the type: ZNF-E; Voltage: DC6V; Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



DC防水线
Waterproof DC line



两芯防水线
Two core waterproof line




SM线
SM line

Model: ZNF-F




外形尺寸图 Size of installation

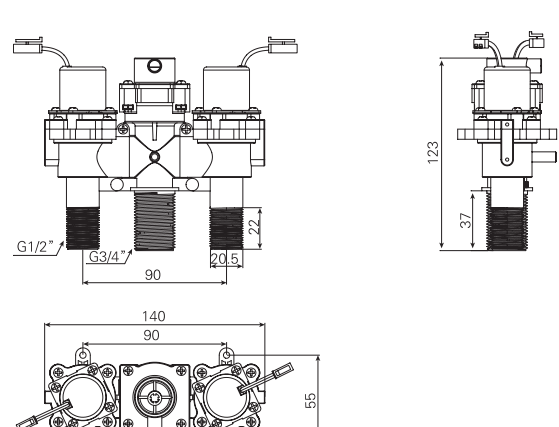

零部件名称 Accessories

序号 NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	自动解压组件	Automatic decompression components
11	阀体组件	Body components

产品分解图 Stucture Diagram

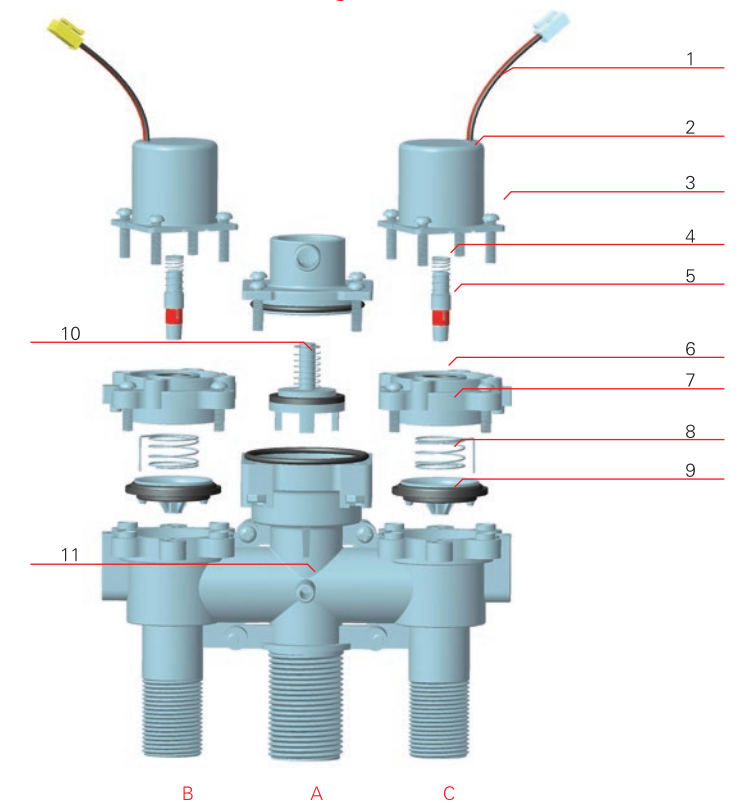


inlet (进水口)

订货须知


1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号：ZNF-F/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：ZNF-F；②电压：DC6V；③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the required product according to the “model meaning” .
Type: znf-f/DC 6V DC pulse type two-core waterproof wire A.
This model has the following meanings: the type: ZNF-F; Voltage: DC6V; Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



DC防水线
Waterproof DC line




两芯防水线
Two core waterproof line



SM线
SM line

Model: ZNF-G


外形尺寸图 Size of installation

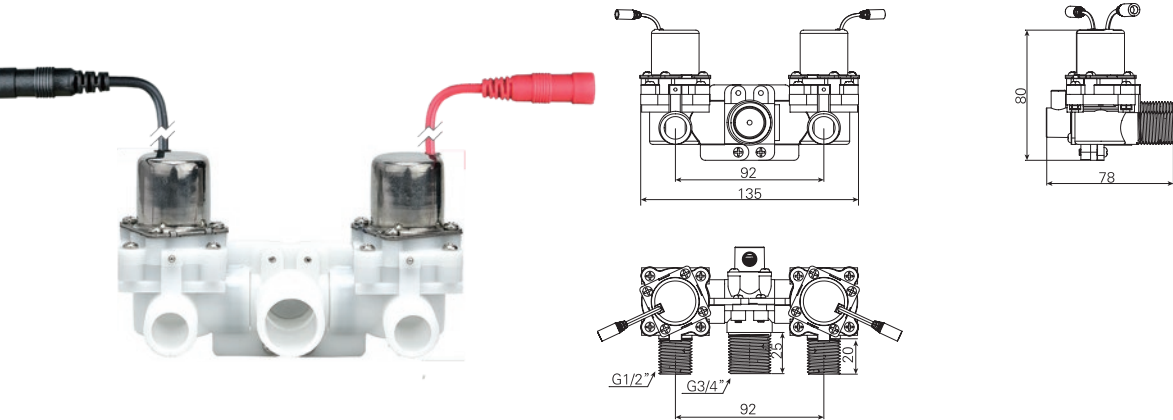

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	阀体组件	Body components

产品分解图 Stucture Diagram

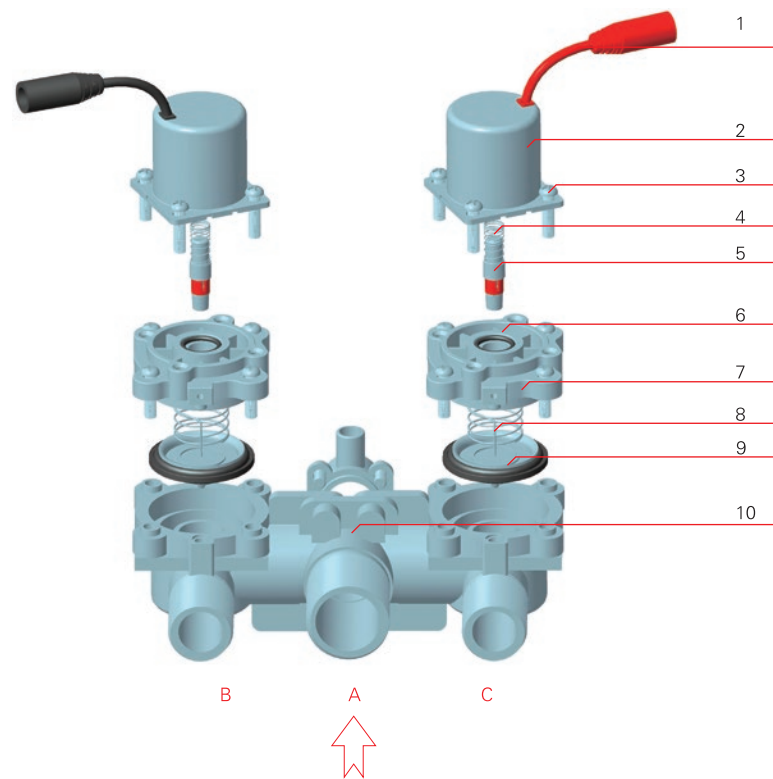

inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号：ZNF-G/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：ZNF-G；②电压：DC6V；③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the required product according to the “model meaning” .
Type: znf-g/DC 6V DC pulse type two-core waterproof wire A.
This model has the following meanings: the type: ZNF- G; Voltage: DC6V; Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



360° 安全无忧

用的放心
是我的硬性指标

✓杂质自清 ✓防堵性能 ✓红外线感应 ✓寿命长 ✓节水环保



综合概述

应用于自动控制系统中:红外线感应洁具流体开关控制，内部利用两个型腔进行减压控制，增强了阀的可靠性和使用寿命，缩短了最高最低压力下阀开关所需的脉冲宽度，独特的杂质自清功能，使其具有优越的防堵性能。采用一进一出的形式，完成自动冲水功能。产品的紧固件均采用螺栓，螺母连接大大提高了产品的强度和寿命。

Summary

Used in the automatic control system, infrared induction sanitary ware fluid, switch control, internal use of two cavity pressure control, enhanced the reliability of the valve and service life, reduces the maximum and minimum pressure valve switch is needed for the pulse width, the unique impurities self-cleaning function, make it has held in superior performance.The automatic flushing function is achieved by adopting one in one. The fastener of the product adopts bolts, and the nut connection greatly improves the strength and life of the product.




龙头脉冲阀系列
Leading pulse valve series

技术指标参数 Technical Feature & Parameter

★ 使用说明 Instruction

额定脉冲电压 Rated voltage	DC6V
线圈电阻 Coil resistance	17 Ω ± 0.5 Ω (20℃)
最低电流 Min Current	320mA
脉冲宽度 Pulse width	30–50ms
工作压力 Operating pressure	0 .02Mpa~0.8Mpa
介质温度 Media temperature	1℃~75℃
响应时间 Responding time	开 ≤ 0.15s关 ≤ 0.5s open ≤ 0.15s close ≤ 0.5s

★ 压力与流量的关系
Relation between pressure
and flow rate

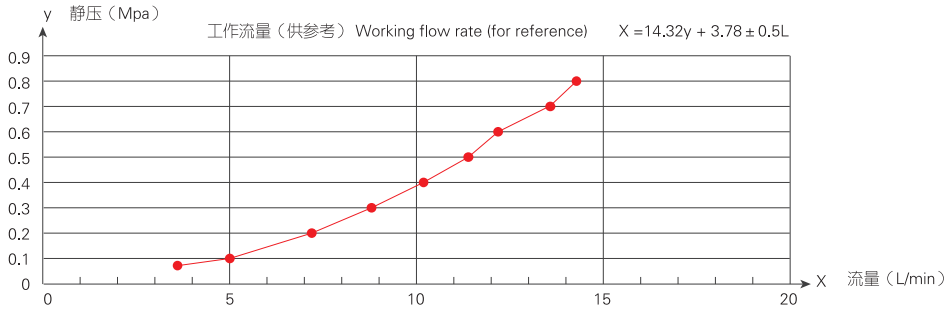

压力(MPa) Pressure (MPa)	0.05	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
流量平均值(KG/min) Average flow rare(KG/min)	3.6	5	7.2	8.8	10.2	11.4	12.2	13.6	14.3

★ 性能试验 Performance test

强度试验 The strength test	静压1 .6MPa Static pressure		耐水压Withstand voltage pressure	1.2Mpa/5min
空载测试 No-load test	Voltage V*3.6(电压),pulse width 50ms(脉冲宽度)		允许限压(电压) Permissible limiting voltage	V*1.15
高压水启动与关闭 High water pressure startup and closing	水压0.8Mpa, 电压DC4.5V, 脉冲宽度50ms,电磁阀能正常启动与关闭 At water pressure 0.8Mpa.voltage DC4.5V,pulse width 50ms,the solenoid valve can be started and closed normally			
低压水启动与关闭 Low water pressure startup and closing	水压0.02Mpa, 电压DC4.5V, 脉冲宽度50ms,电磁阀能正常启动与关闭 At water pressure 0.02Mpa.voltage DC4.5V,pulse width 50ms,the solenoid valve can be started and closed normally			
高压水泄漏量 Leakage upon high water pressure	1.2Mpa 无泄漏 1.2Mpa zero leakage			
低压水泄漏量 Leakage upon low water pressure	0.02Mpa泄漏量≤0.1mL/min 0.02Mpa leakage ≤0.1 mL/min			
电气强度 Electric strength	导电部分与安装孔及非导电盒属之间应能承受500v/50Hz, 漏电流0.75mA, 1 min耐压而无击穿现象 Among the conductive part,mounting hole and nonconductive metal,it can withstand 500V/50Hz leakage current 0.75mA for 1 min without the breakdown			
绝缘电阻 Insulation resistance	用500V兆欧表测试导电部分与非导电金属之间的电阻 ≥ 20 MΩ The resistance between the charged part and nonconductive metallic part tested by the megohmmeter of 500V ≥ 20 MΩ			
密封试验 Sealing test	Static pressure 静压	空气 Air	高压 High pressure	1 MPa
			低压 Low pressure	0.02 MPa
		冷水 Cold water	高压 High pressure	1.2 MPa
			低压 Low pressure	0.02 MPa
		热水 Hot water	高压 High pressure	0.8 MPa
			低压 Low pressure	0.02 MPa
使用寿命试验 Service life	≥Min 1,000,000 cycles (CJ/T194—2004) ≥ 1,000,000 周期; 符合CJ/T194—2004要求			

★ 工作环境要求 Requirements of working environment

工作环境温度 Temp.of working environ mlent	1℃~+60℃	允许限压 (水压) Permissible limiting pressure (water pressure)	≤ 1.2Mpa
工作环境湿度 Humidity of working environment	35%~90%RH(无结露状态) 35%~90%RH(No condensation state)	安装方向 Mounting direction	垂直方向, 倾斜度不超过60度 It is mounted in vertical direction, the inclination doesn't exceed 60 degrees
保存温度 Storage temp	–5~+80℃(无结冰状态) –5~+80℃(No freezing state)		
保存湿度 Storage humidity	25%~95%RH(无结露状态) 25%~95%RH(No condensation state)		


- ✓ 杂质自清
- ✓ 防堵性能
- ✓ 寿命长
- ✓ 红外线感应
- ✓ 节水环保



Model: LTF-A(白)





外形尺寸图 Size of installation

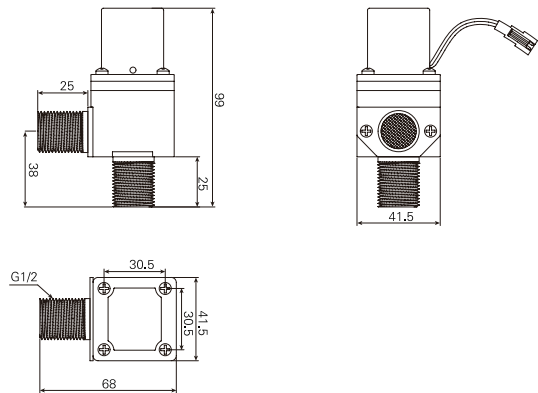


零部件名称 Accessories

序号 NO.	名称	Name
1	线圈组件	Coil components
2	电源线	Power cord
3	螺钉4–M4	Screw4–M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片件组	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces
13	出水管件	Water pipe fittings

产品分解图 Stucture Diagram

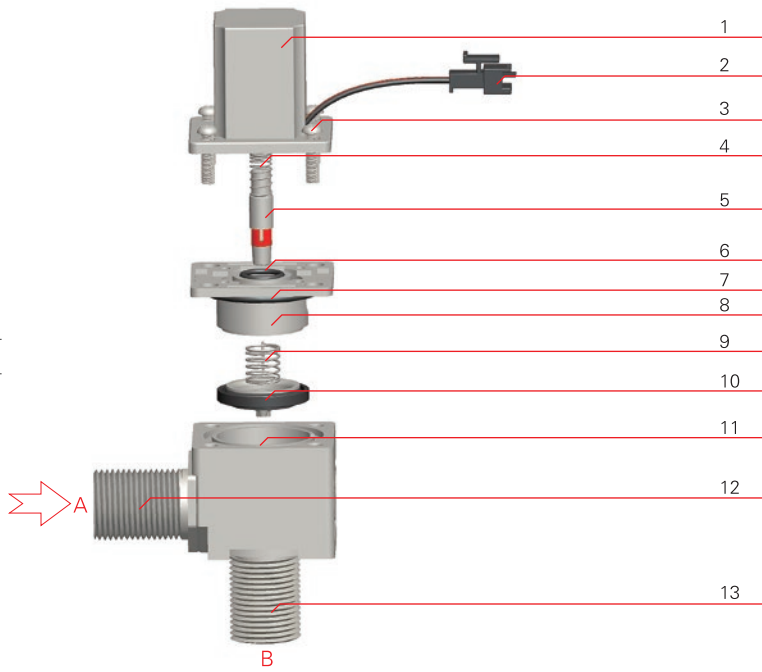

25mm




30mm

订货须知


- 用户在订货时, 请根据“型号含义”注明所需产品具体型号规格和数量。
型号: LTF-A/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下: ①型号: LTF-A; ②电压: DC 6V; ③开关型式: 直流脉冲式; ④引出线类型: 二芯防水线A端;
- 如用户有特殊要求, 请在订购时详细指明。




inlet (进水口)




inlet (进水口)



DC防水线
Waterproof DC line



两芯防水线
Two core waterproof line




SM线
SM line

Note

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Model: Itf-a/DC 6V/DC pulse type two-core waterproof wire A.
This model is defined in the following: type: Itf-a; Voltage: DC 6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

Model: LTF-A(黑)



外形尺寸图 Size of installation

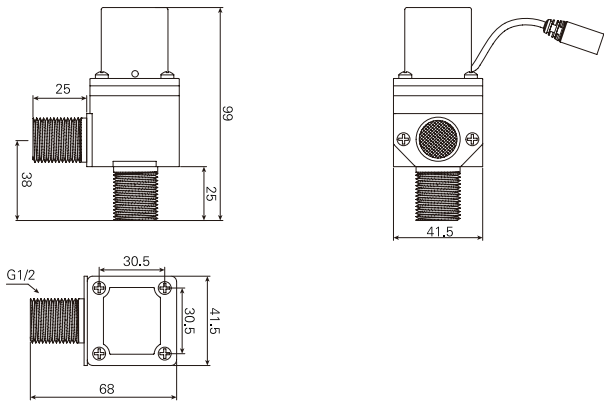

零部件名称 Accessories

序号NO.	名称	Name
1	线圈组件	Coil components
2	电源线	Power cord
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces
13	出水管件	Water pipe fittings

产品分解图 Stucture Diagram

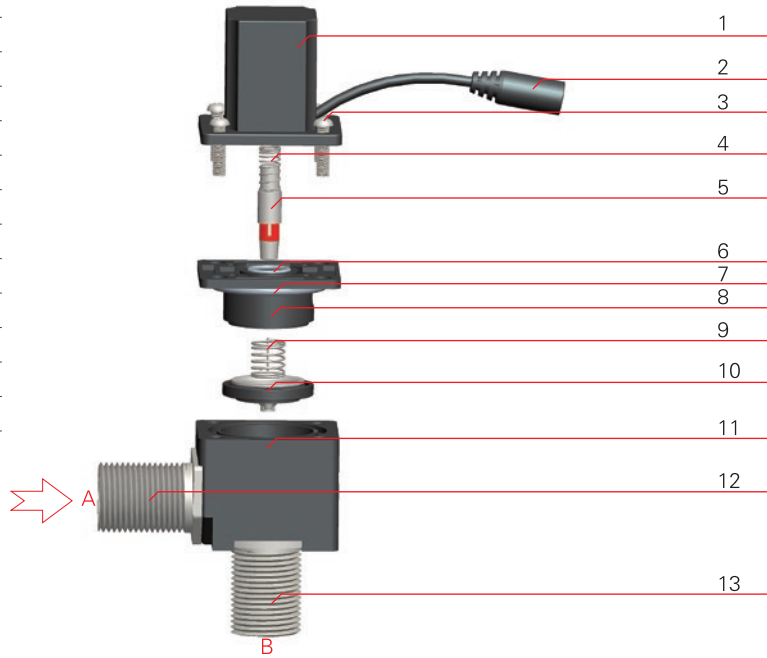

订货须知


1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：LTF-A/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：LTF-A；②电压：DC6V；
③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Model: Itf-a/DC 6V/DC pulse type two-core waterproof wire A.
This model is defined in the following: type: Itf-a; (2) voltage:DC 6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

Model: LTF-B


外形尺寸图 Size of installation

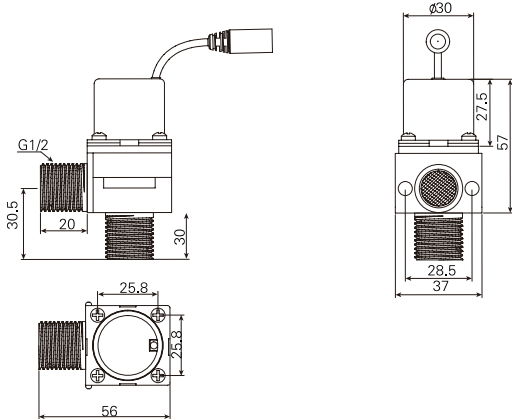

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Powercord
2	线圈组件	Coil components
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	O型圈	O-rings
11	阀体	Valve body

产品分解图 Stucture Diagram

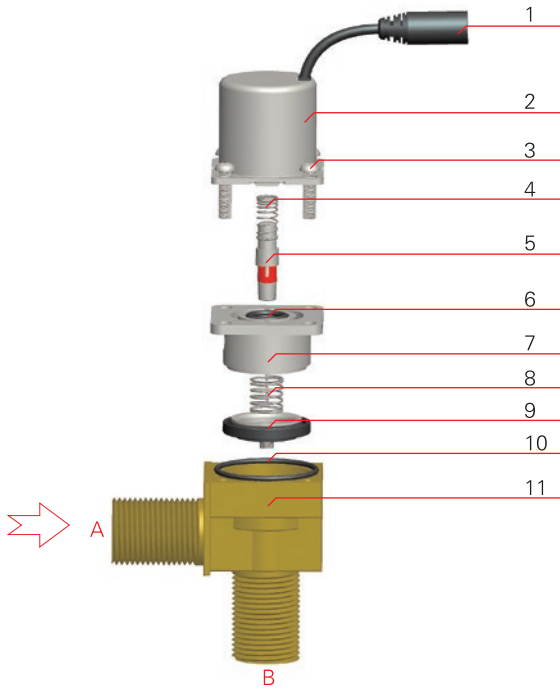

inlet (进水口)



订货须知


1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号：LTF-B/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：LTF-B；②电压：DC 6V；
③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Model: Itf-b/DC 6V/DC pulse type two-core waterproof wire A.
This model is defined in the following: type: Itf-b; Voltage: DC 6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

Model: LTF-C


外形尺寸图 Size of installation

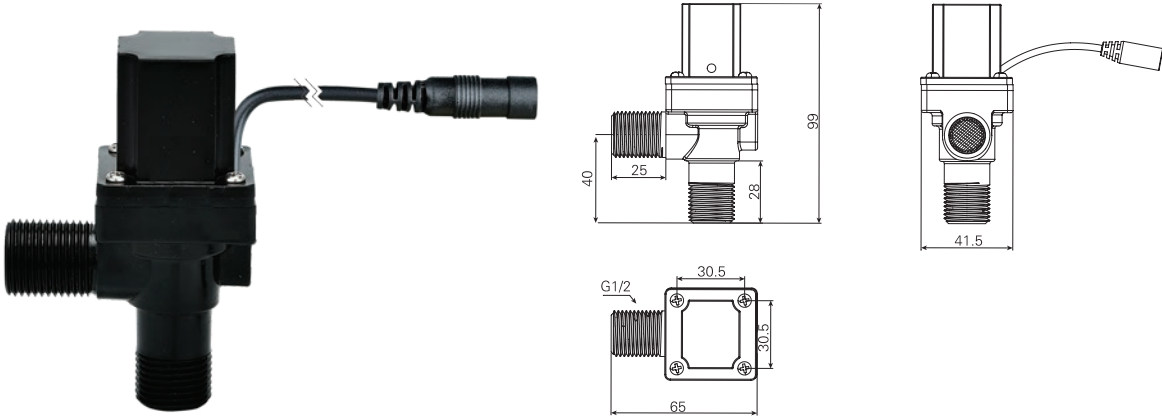

零部件名称 Accessories

序号NO.	名称	Name
1	线圈组件	Coil components
2	电源线	Power cord
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces
13	出水管件	Water pipe fittings

产品分解图 Stucture Diagram

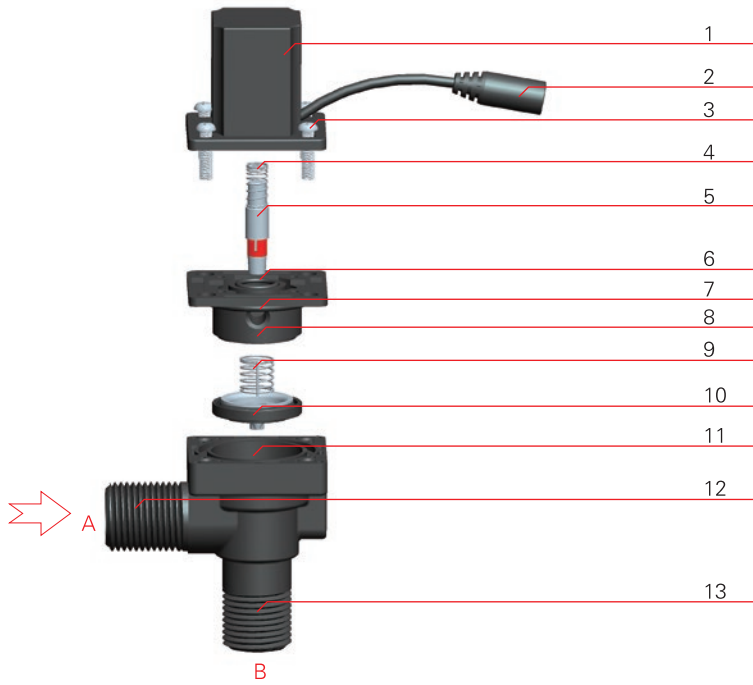

inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：LTF-C/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：LTF-C；②电压：DC6V；③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note


When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Model: Itf-c/DC 6V/DC pulse type two-core waterproof wire A.
This model is defined in the following: type: Itf-c; (2) voltage:DC 6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



- ☑ 杂质自清
- ☑ 防堵性能
- ☑ 寿命长
- ☑ 红外线感应
- ☑ 节水环保

Model: LTF-D



外形尺寸图 Size of installation

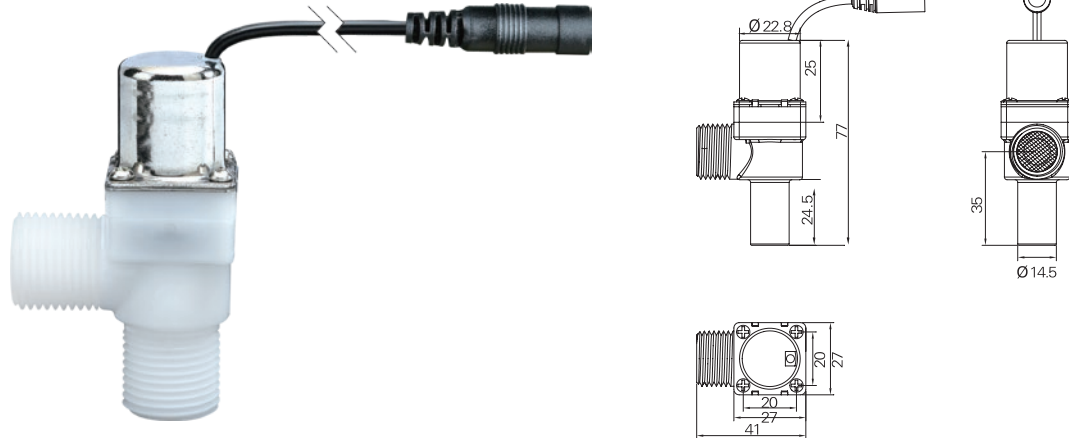

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Powercord
2	线圈组件	Coil components
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	阀体	Valve body

产品分解图 Stucture Diagram

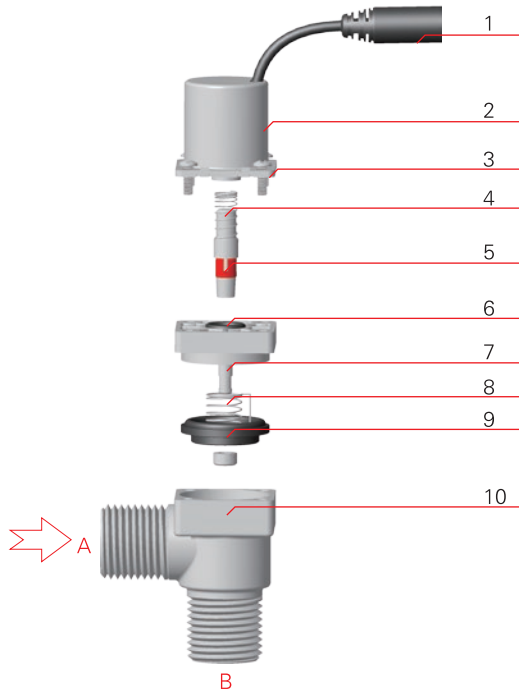

inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：LTF-D/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：LTF-D；②电压：DC 6V；③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。


Note

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Model: Itf-d/DC 6V/DC pulse type two-core waterproof wire A.
This model is defined in the following: type: Itf-d; Voltage: DC 6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



Model: LTF-E


外形尺寸图 Size of installation

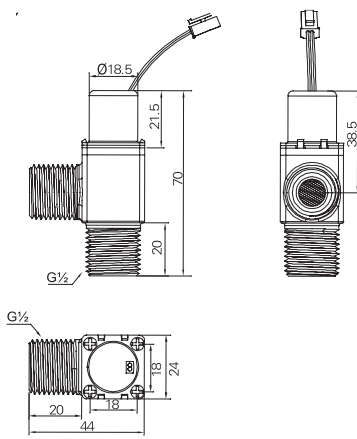

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Powercord
2	线圈组件	Coil components
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	阀体	Valve body

产品分解图 Stucture Diagram

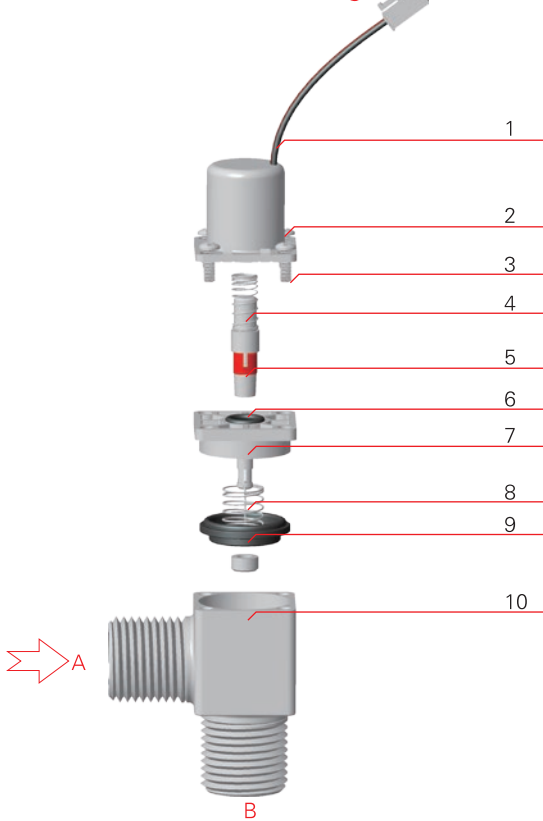


inlet (进水口)

订货须知


1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：LTF-E/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：LTF-E；②电压：DC6V；
③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note


When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Model: Ltf-e/DC 6V/DC pulse type two-core waterproof wire A.
This model is defined in the following: type: Ltf-e; (2) voltage:DC 6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



DC防水线
Waterproof DC line



两芯防水线
Two core waterproof line




SM线
SM line

- ☑ 杂质自清
- ☑ 防堵性能
- ☑ 寿命长
- ☑ 红外线感应
- ☑ 节水环保

Model: LTF-F


外形尺寸图 Size of installation

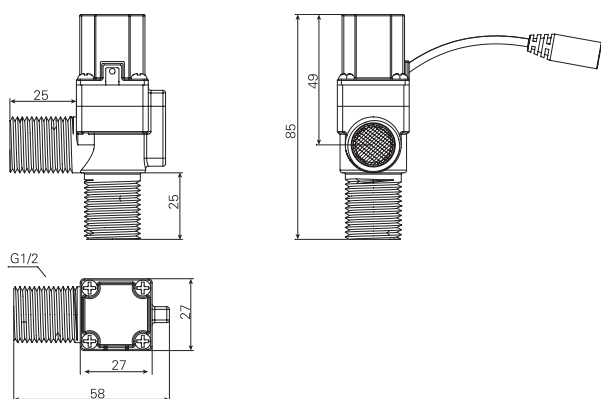

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Powercord
2	线圈组件	Coil components
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	阀体	Valve body
11	进水管件	Inlet pipe pieces
12	出水管件	Water pipe fittings

产品分解图 Stucture Diagram

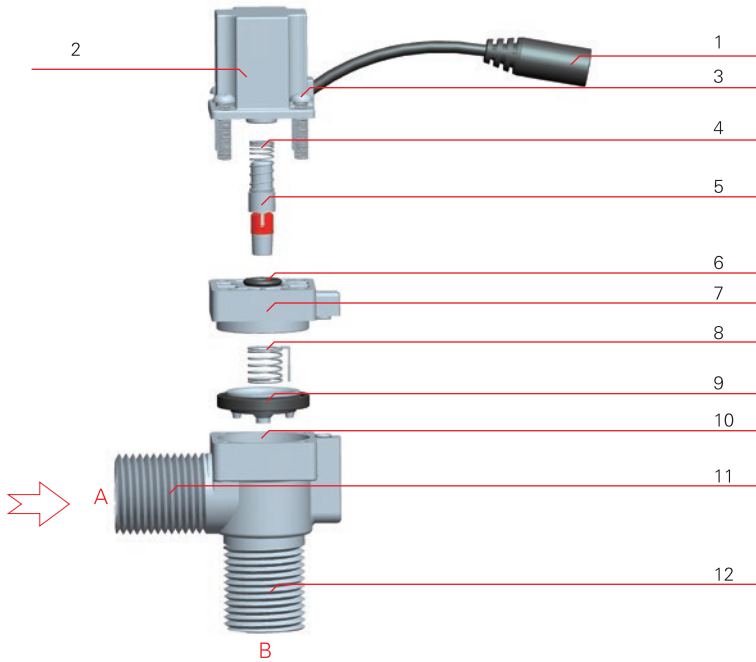


inlet (进水口)

订货须知


1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：LTF-F/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：LTF-F；②电压：DC 6V；
③开关型式：直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note


When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Model: LTF-F/DC 6V/DC pulse type two-core waterproof wire A.
This model is defined in the following: type: LTF-F; Voltage: DC 6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



DC防水线
Waterproof DC line



两芯防水线
Two core waterproof line



SM线
SM line



360° 安全无忧

用的放心 是我的硬性指标

- ✓杂质自清
- ✓防堵性能
- ✓红外线感应
- ✓寿命长
- ✓节水环保

综合概述

应用于自动控制系统中:红外线感应洁具智能马桶、开关控制，内部利用两个型腔进行减压控制，增强了阀的可靠性和使用寿命，缩短了最高最低压力下阀开关所需的脉冲宽度，独特的杂质自清功能，使其具有优越的防堵性能。采用一进一出的形式，完成自动冲水功能。

Summary


Used in the automatic control system, infrainfra red ray induction sanitary ware toilets, switch control, internal use of two cavity pressure control, enhanced the reliability of the valve and service life, infra reduces the maximum and minimum pressure valve switch is needed for the pulse width, the unique impurities self-cleaning function, make it has held in superior performance. The automatic flushing function is achieved by adopting one in one.

技术指标参数 Technical Feature & Parameter

★ 使用说明 Instruction

额定脉冲电压 Rated voltage	DC 6V
线圈电阻 Coil resistance	17 Ω ± 0.5 Ω (20℃)
最低电流 Min Current	320mA
脉冲宽度 Pulse width	30~50ms
工作压力 Operating pressure	0 .02Mpa~0.8Mpa
介质温度 Media temperature	1℃~75℃
响应时间 Responding time	开 ≤ 0.15s关 ≤0.5s open ≤0.15s close ≤0.5s

★ 压力与流量的关系 Relation between pressure and flow rate

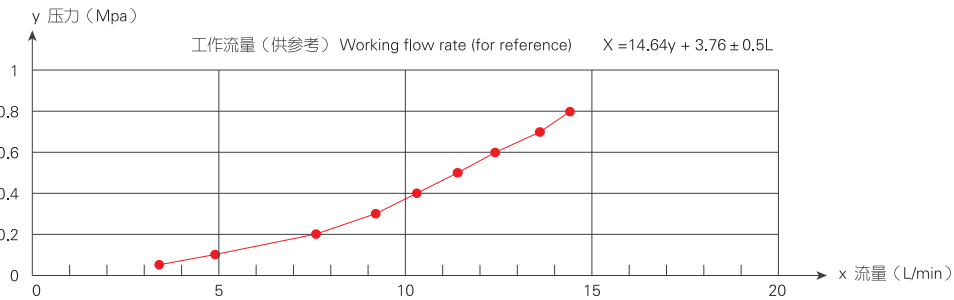

压力(MPa) Pressure (MPa)	0.05	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
流量平均值(KG/min) Average flow rare(KG/min)	3.4	4.9	7.6	9.2	10.3	11.4	12.4	13.6	14.4

★ 性能试验 Performance test

强度试验 The strength test	静压 1.6MPa Static pressure		耐水压 Withstand voltage pressure	1.2Mpa/5min
空载测试 No-load test	Voltage V*(3.6电压) Pulse width 50ms(脉冲宽度)		允许限压(电压) Permissible limiting voltage	V*1.15
高水压启动与关闭 High water pressure startup and closing	水压0.8Mpa，电压DC4.5V，脉冲宽度50ms，电磁阀能正常启动与关闭 At water pressure 0.8Mpa, voltage DC4.5V, pulse width 50ms,the solenoid valve can be started and closed normally			
低水压启动与关闭 Low water pressure startup and closing	水压0.02Mpa，电压DC4.5V，脉冲宽度50ms，电磁阀能正常启动与关闭 At water pressure 0.02Mpa, voltage DC4.5V, pulse width 50ms,the solenoid valve can be started and closed normally			
高水压泄漏量 Leakage upon high water pressure	1.2 Mpa 无泄漏 1.2Mpa zero leakage			
低水压泄漏量 Leakage upon low water pressure	0.02Mpa泄漏量 ≤0.1mL/min 0.02Mpa leakage ≤0.1 mL/min			
电气强度 Electric strength	导电部分与安装孔及非导电金属之间应能承受500v/50H z，漏电流0.75mA，1 min耐压而无击穿现象 Among the conductive part,mounting hole and nonconductive metal,it can withstand 500V/50Hz leakage current 0.75mA for 1 min without the breakdown			
绝缘电阻 Insulation resistance	用500V兆欧表测试导电部分与非导电金属之间的电阻 ≥20M Ω The resistance between the charged part and nonconductive metallic part tested by the megohmmeter of 500V ≥20M Ω			
密封试验 Sealing test	Static pressure 静压	空气 Air	高压 High pressure	1 MPa
			低压 Low pressure	0.02 MPa
		冷水 Cold water	高压 High pressure	1.2 MPa
			低压 Low pressure	0.02 MPa
		热水 Hot water	高压 High pressure	0.8 MPa
			低压 Low pressure	0.02 MPa
使用寿命试验 Service life	≥Min 1,000,000 cycles (CJ/T194-2004) ≥1, 000, 000 周期; 符合CJ/T194-2004要求			

★ 工作环境要求 Requirements of working environment


工作环境温度 Temp.of working envlron mlent	1℃~+60℃	允许限压（水压） Permissible limiting pressure (water pressure)	≤1.2Mpa
工作环境湿度 Humidity of working envlronment	35%~90% RH(无结露状态) 35%~90% RH(No condensation state)	安装方向 Mounting direction	垂直方向，倾斜度不超过60度 It is mounted in vertical direction, the inclination doesn't exceed 60 degress
保存温度 Storage temp	-5~ +80℃ (无结冰状态) -5~ +80℃ (No freezing state)		
保存湿度 Storage humidity	25% - 95% RH(无结露状态) 25% - 95% RH(No condensation state)		



暗装小冲脉冲阀/小冲一体化脉冲阀系列
Concealed small infra red pulse valve / small punch integrated pulse valve series

Model: XCF-A



外形尺寸图 Size of installation

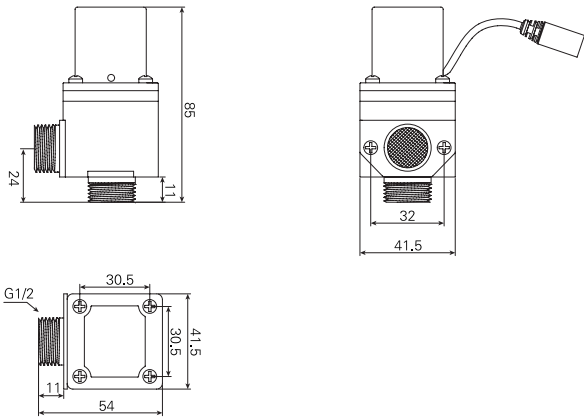

零部件名称 Accessories

序号NO.	名称	Name
1	线圈组件	Power cord
2	电源线	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces
13	出水管件	Water pipe fittings

产品分解图 Stucture Diagram

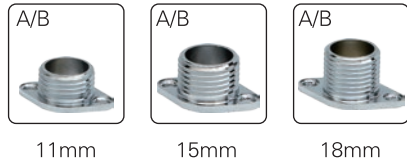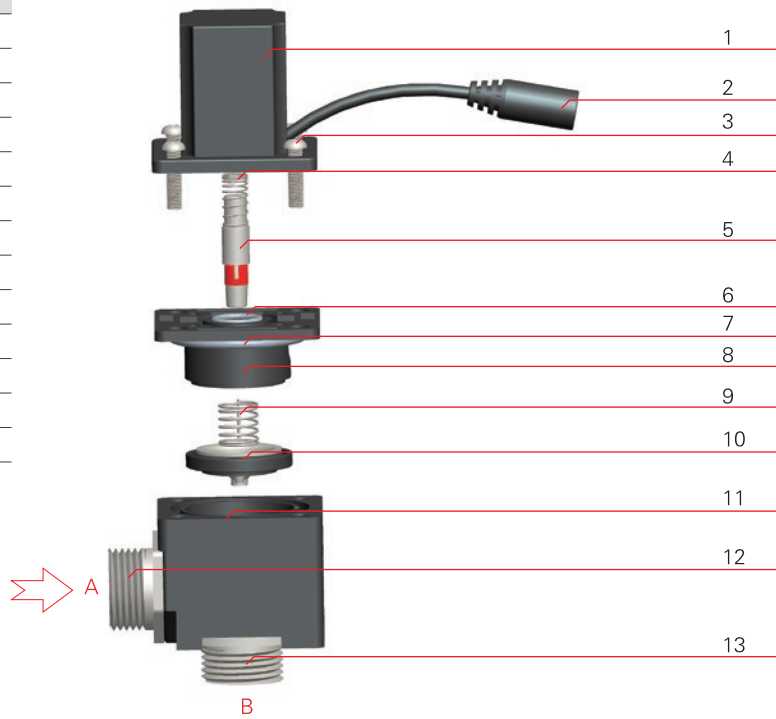

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-A/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-A;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。



Note



When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - A/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - A; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

- ☑ 杂质自清 ☑ 防堵性能 ☑ 寿命长
- ☑ 红外线感应 ☑ 节水环保



Model: XCF-B180



外形尺寸图 Size of installation

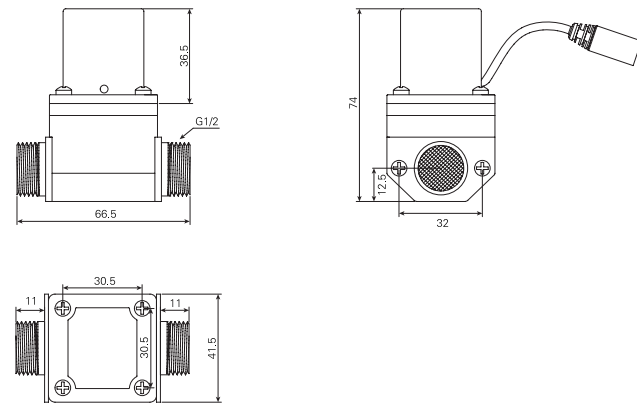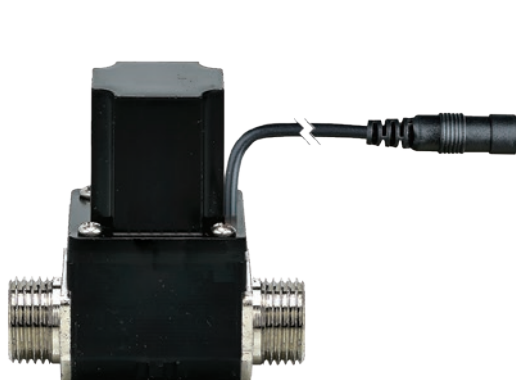


零部件名称 Accessories

序号NO.	名称	Name
1	线圈组件	Coil components
2	电源线	Power cord
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces

产品分解图 Stucture Diagram

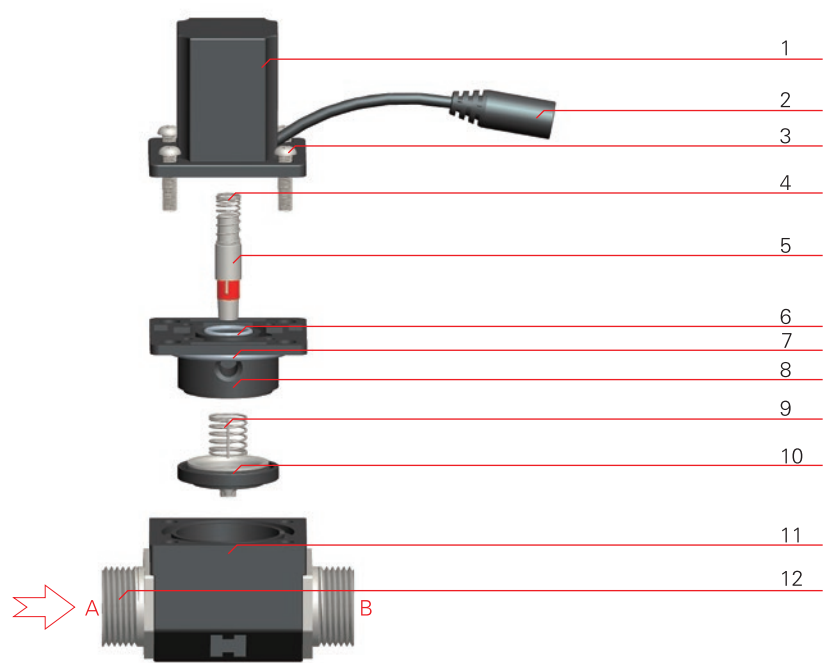

inlet (进水口) inlet (进水口)

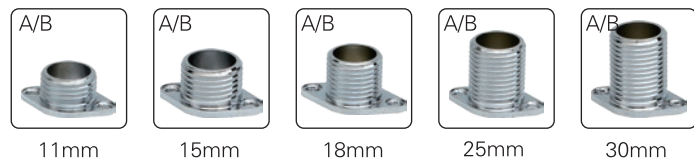

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-B180/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-B180;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note



When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - B180/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - B180; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



暗装小冲脉冲阀/小冲一体化脉冲阀系列
Concealed small infra red pulse valve / small punch integrated pulse valve series

Model: XCF-C180



外形尺寸图 Size of installation

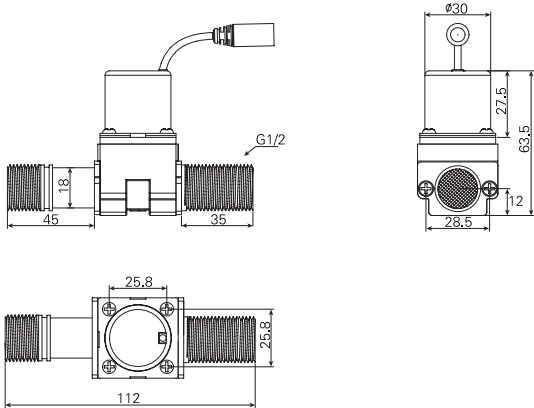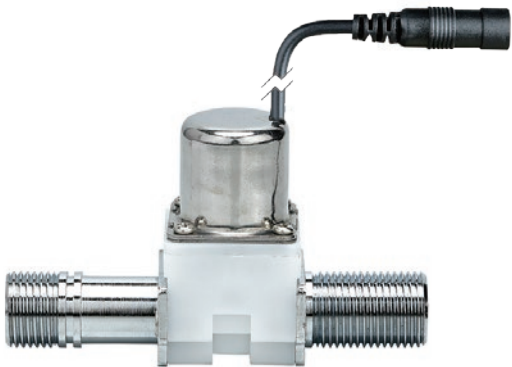

零部件名称 Accessories

序号NO	名称	Name
1	电源键	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces
13	出水管件	Water pipe fittings

产品分解图 Stucture Diagram

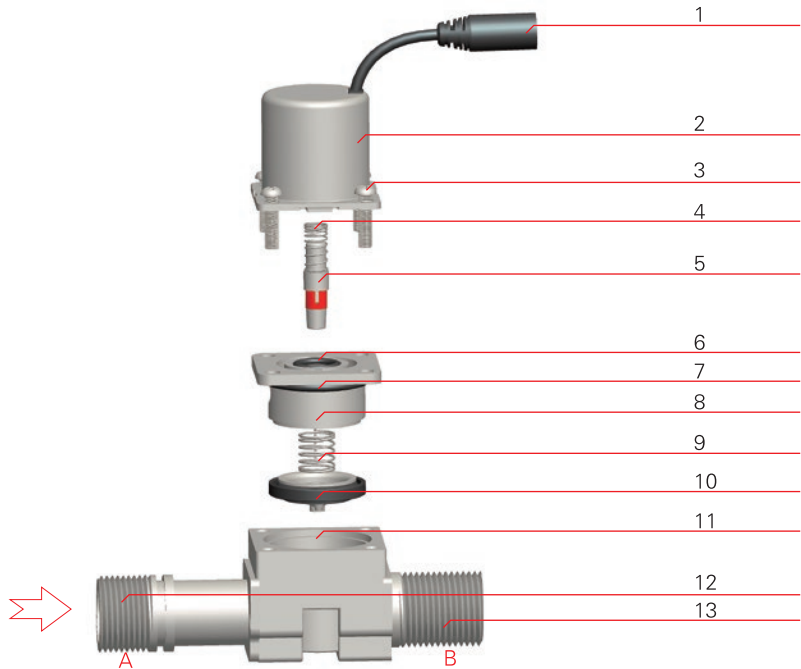

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-C180/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-C180;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。



Note

When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - C180/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - C180; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.




- ☑ 杂质自清 ☑ 防堵性能 ☑ 寿命长
- ☑ 红外线感应 ☑ 节水环保



Model: XCF-D90



外形尺寸图 Size of installation

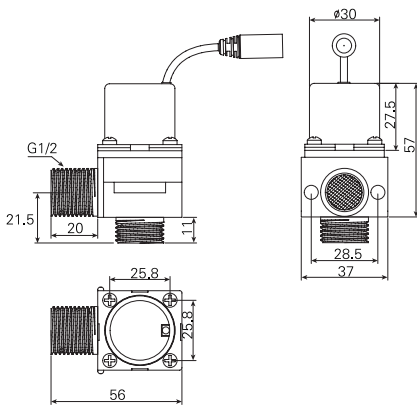

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body

产品分解图 Stucture Diagram

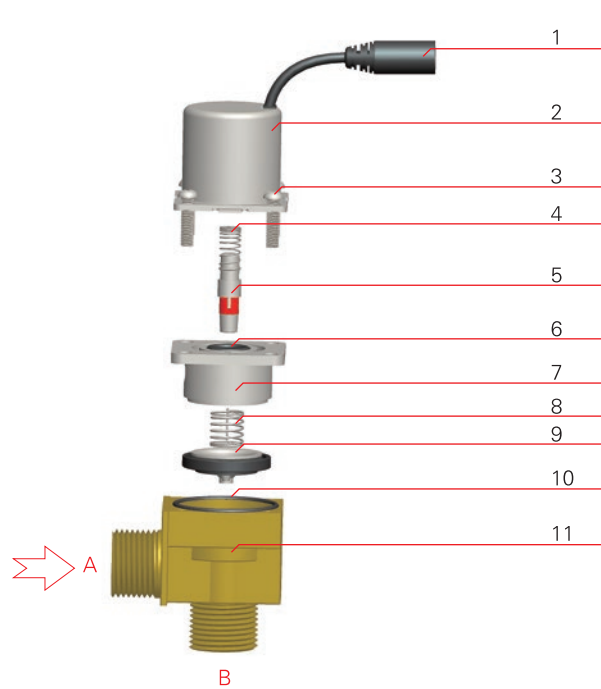

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-D90/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-D90;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。



Note


When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - D90/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - D90; Voltage:DC6V;S
witch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



暗装小冲脉冲阀/小冲一体化脉冲阀系列
Concealed small infra red pulse valve / small punch integrated pulse valve series

Model: XCF-E180


外形尺寸图 Size of installation

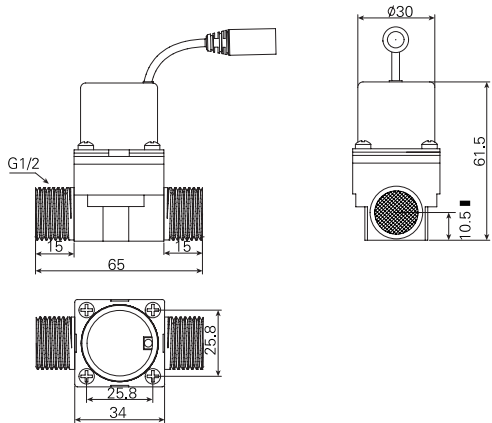


零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring sleaning
9	膜片组件	Diaphragm components
10	O型圈	O-rings
11	阀体	Valve body


产品分解图 Stucture Diagram

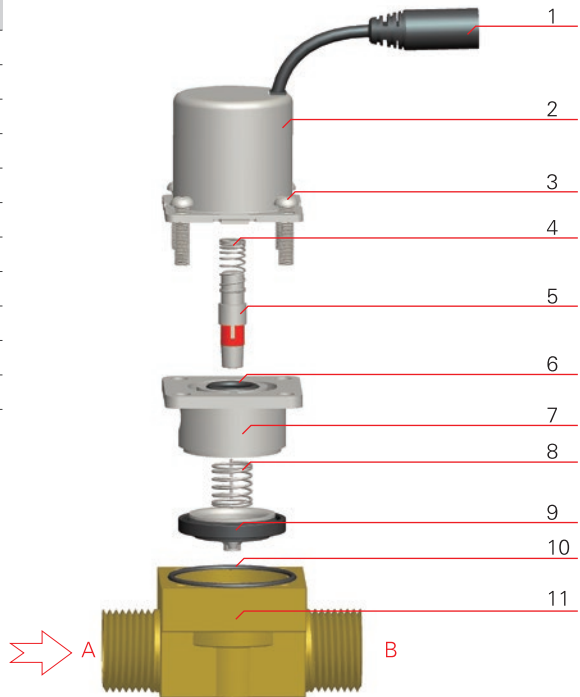


inlet (进水口)



DC防水线
Waterproof DC line



两芯防水线
Two core waterproof line



SM线
SM line

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-E180/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-E180;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note



When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - E180/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - E180; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

- ☑ 杂质自清 ☑ 防堵性能 ☑ 寿命长
- ☑ 红外线感应 ☑ 节水环保



Model: XCF-F180



外形尺寸图 Size of installation

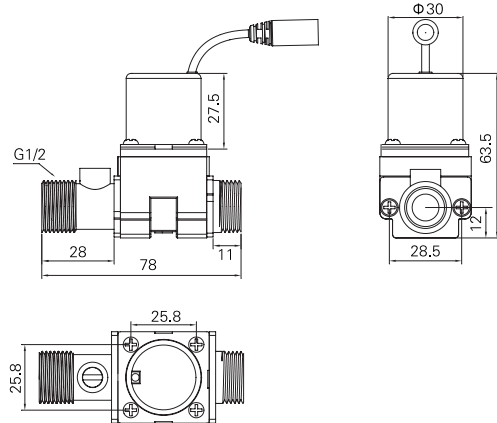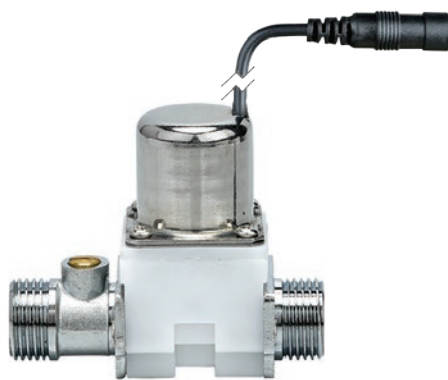


零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	流量调节开关	Flow fegulating switch
13	进水管件	Inlet pipe pieces


产品分解图 Stucture Diagram

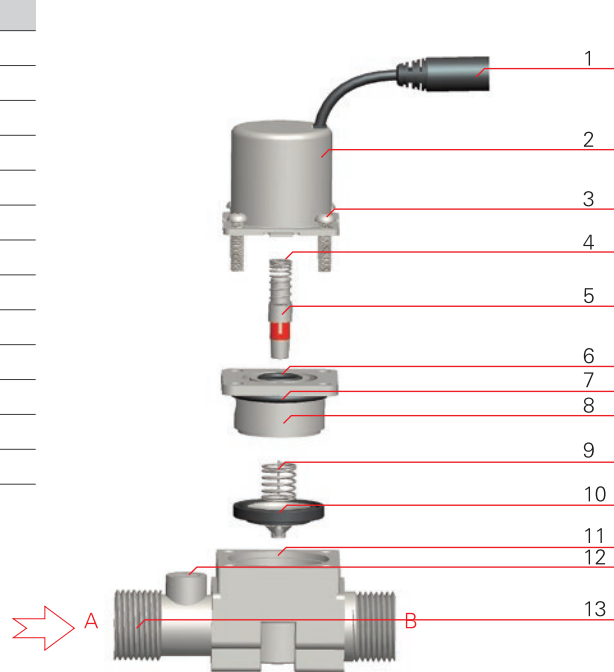


30mm




45mm




13mm



15mm




18mm




28mm




inlet (进水口)



DC防水线
Waterproof DC line



两芯防水线
Two core waterproof line



SM线
SM line

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-F180/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-F180;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - F180/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - F180; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.




暗装小冲脉冲阀/小冲一体化脉冲阀系列

Concealed small infra red pulse valve / small punch integrated pulse valve series

Model: XCF-G180



外形尺寸图 Size of installation

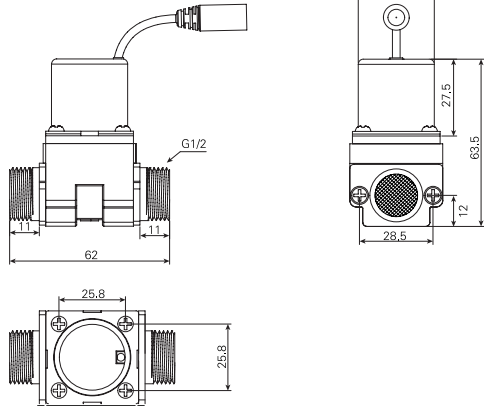


零部件名称 Accessories

序号NO	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces
13	出水管件	Outlet fittings

产品分解图 Stucture Diagram

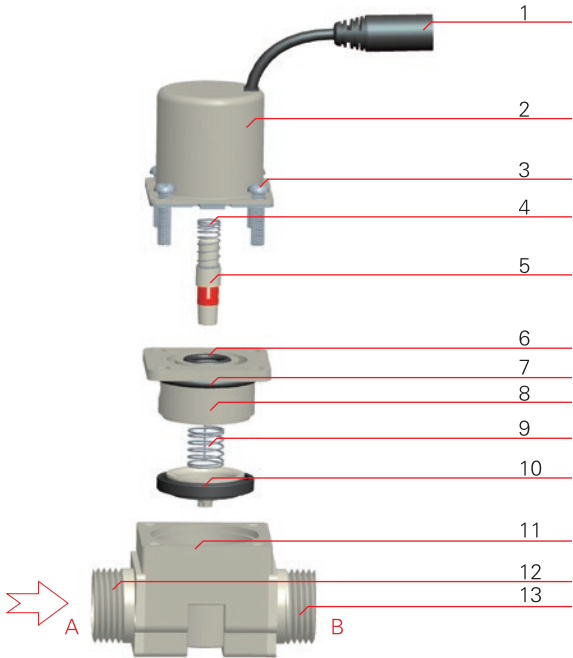

inlet (进水口) inlet (进水口)

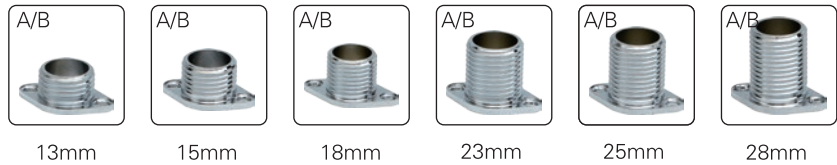

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-G180/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-G180;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note


When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - G180/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - G180; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

- ☑ 杂质自清 ☑ 防堵性能 ☑ 寿命长
- ☑ 红外线感应 ☑ 节水环保



Model: XCF-H




外形尺寸图 Size of installation

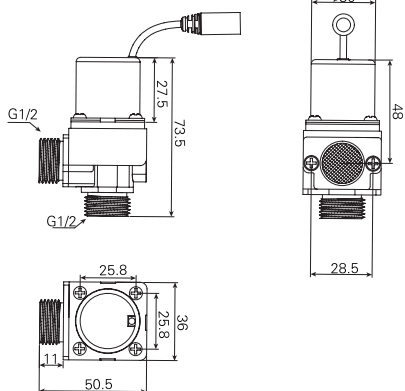

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces
13	出水管件	Outlet fittings

产品分解图 Stucture Diagram

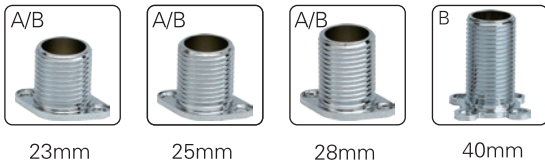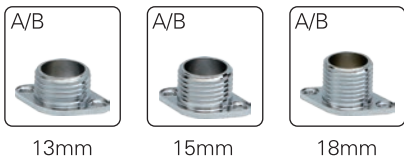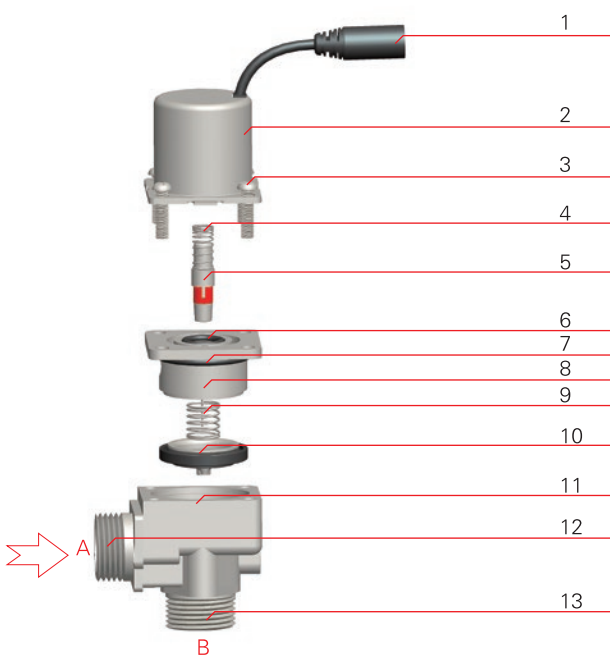

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-H/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-H;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - H/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - H; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

小冲暗装小冲脉冲阀/小冲一体化脉冲阀系列




暗装小冲脉冲阀/小冲一体化脉冲阀系列

Concealed small infra red pulse valve / small punch integrated pulse valve series

Model: XCF-I180


外形尺寸图 Size of installation

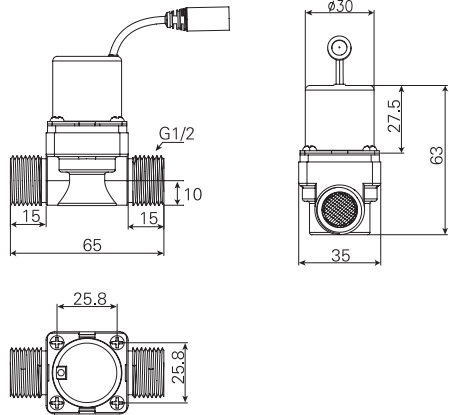

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces
13	出水管件	Outlet fittings

产品分解图 Stucture Diagram

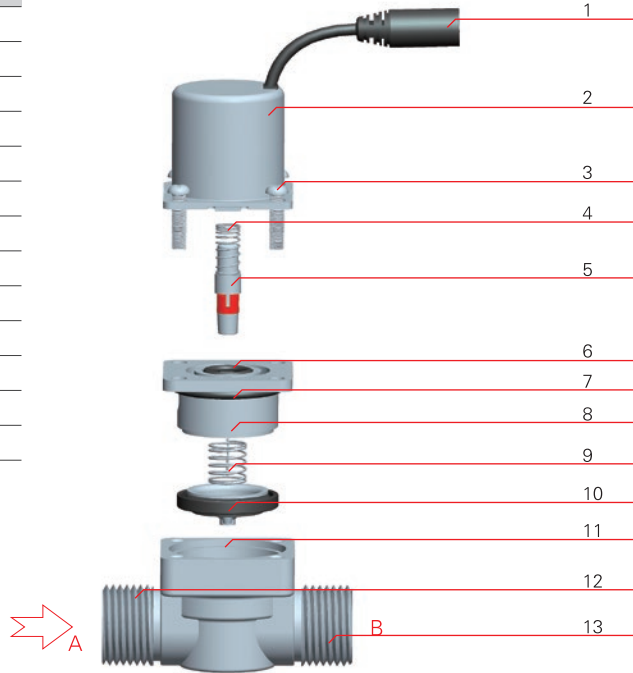

inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-I180/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-I180;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - I180/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - I180; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.




- ☑ 杂质自清
- ☑ 防堵性能
- ☑ 寿命长
- ☑ 红外线感应
- ☑ 节水环保



Model: XCF-J


外形尺寸图 Size of installation

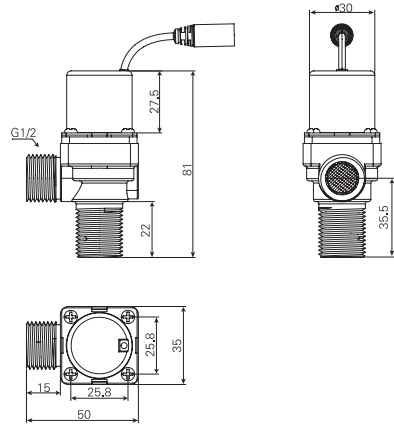

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces
13	出水管件	Outlet fittings

产品分解图 Stucture Diagram

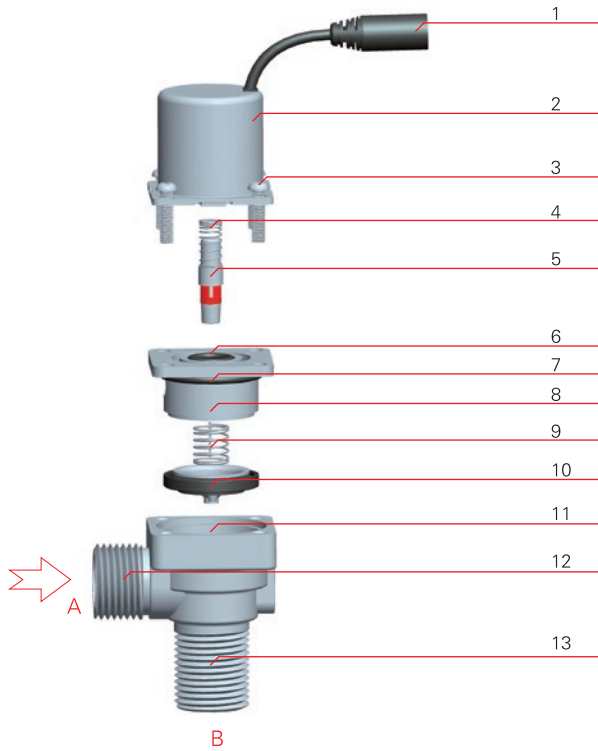


inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-J/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-J;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - J/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - J; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

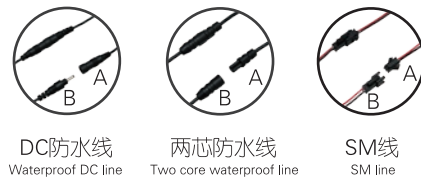





暗装小冲脉冲阀/小冲一体化脉冲阀系列

Concealed small infra red pulse valve / small punch integrated pulse valve series

Model: XCF-K


外形尺寸图 Size of installation

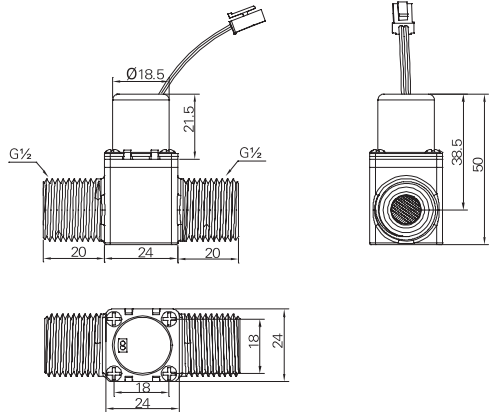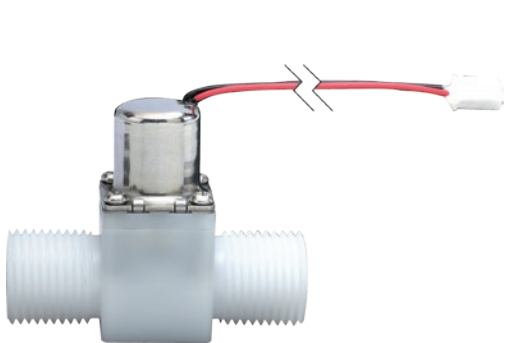

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	流量调节开关	Flow regulatiang switch
12	过滤组件	Filtering component
13	阀体	Valve body

产品分解图 Stucture Diagram

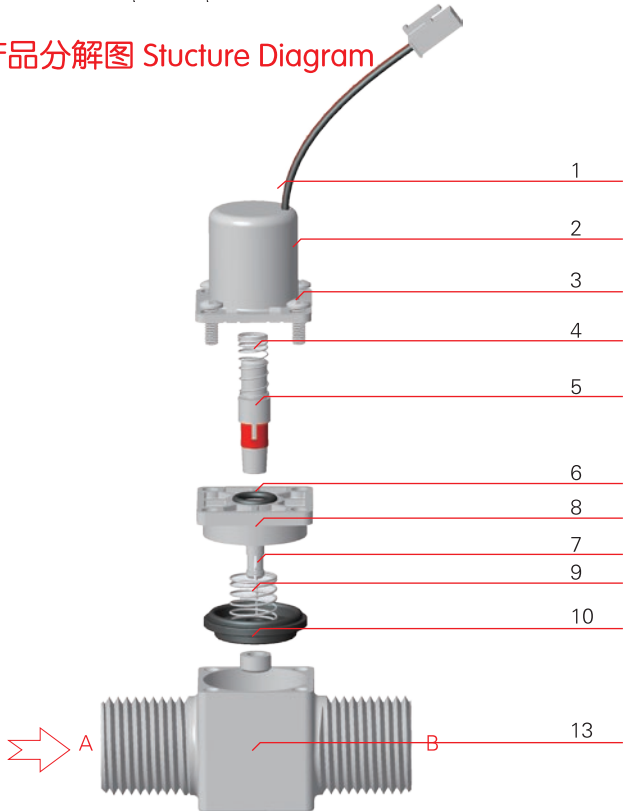


inlet（进水口）

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-K/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-K;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - K/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - K; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



DC防水线
Waterproof DC line

两芯防水线
Two core waterproof line


SM线
SM line



- ☒ 杂质自清
- ☒ 防堵性能
- ☒ 寿命长
- ☒ 红外线感应
- ☒ 节水环保

Model: XCF-L


外形尺寸图 Size of installation

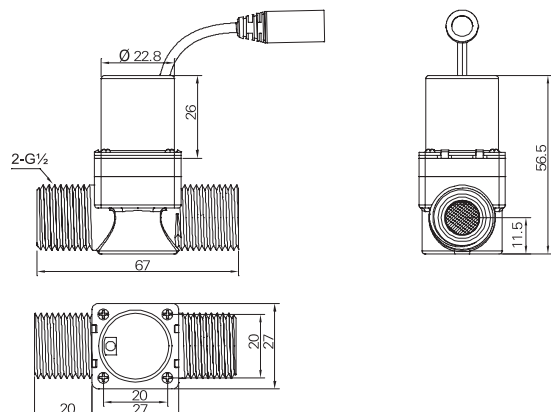

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces
13	出水管件	Outlet fittings

产品分解图 Stucture Diagram

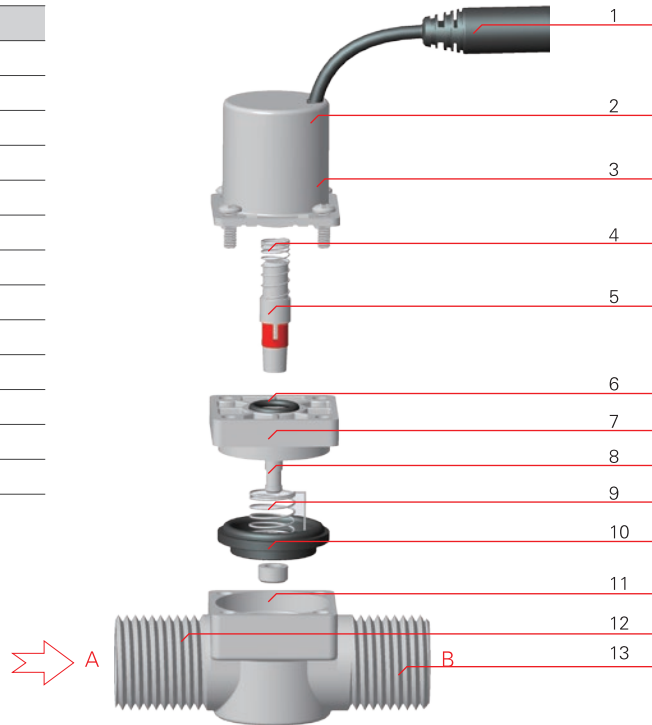


inlet（进水口）

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：XCF-L/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：XCF-L;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: XCF - L/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: XCF - L; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.



DC防水线
Waterproof DC line

两芯防水线
Two core waterproof line

SM线
SM line




暗装小冲脉冲阀/小冲一体化脉冲阀系列

Concealed small infra red pulse valve / small punch integrated pulse valve series

Model: YTH-A180


外形尺寸图 Size of installation

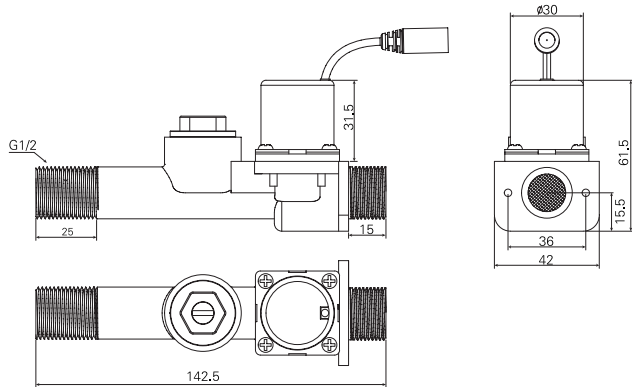

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	流量调节开关	Flow regulatiang switch
12	过滤组件	Filtering component
13	阀体	Valve body

产品分解图 Stucture Diagram

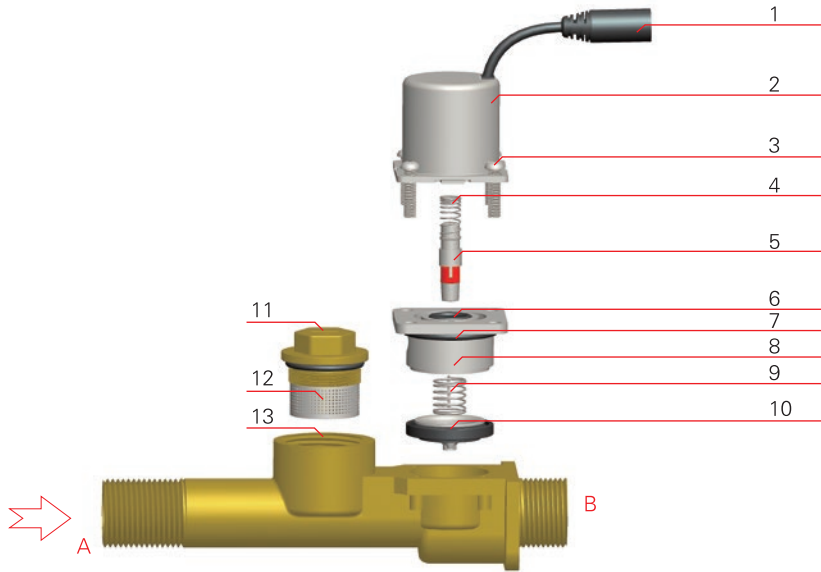

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：YTH-A180/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：YTH-A180;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note


When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: YTH - A180/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: YTH - A180; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

- ☒ 杂质自清 ☒ 防堵性能 ☒ 寿命长
- ☒ 红外线感应 ☒ 节水环保



Model: YTH-B180


外形尺寸图 Size of installation

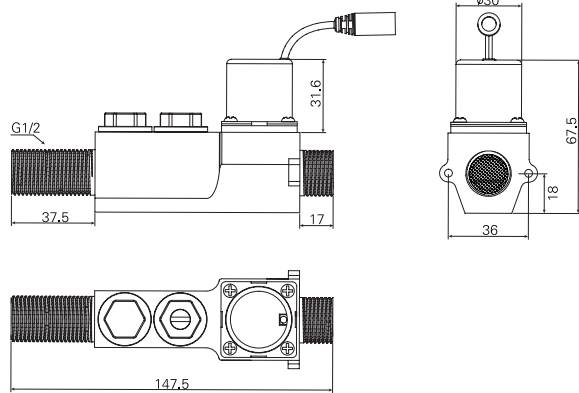

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	流量调节开关	Flow regulatiang switch
12	过滤组件	Filtering component
13	阀体	Valve body

产品分解图 Stucture Diagram

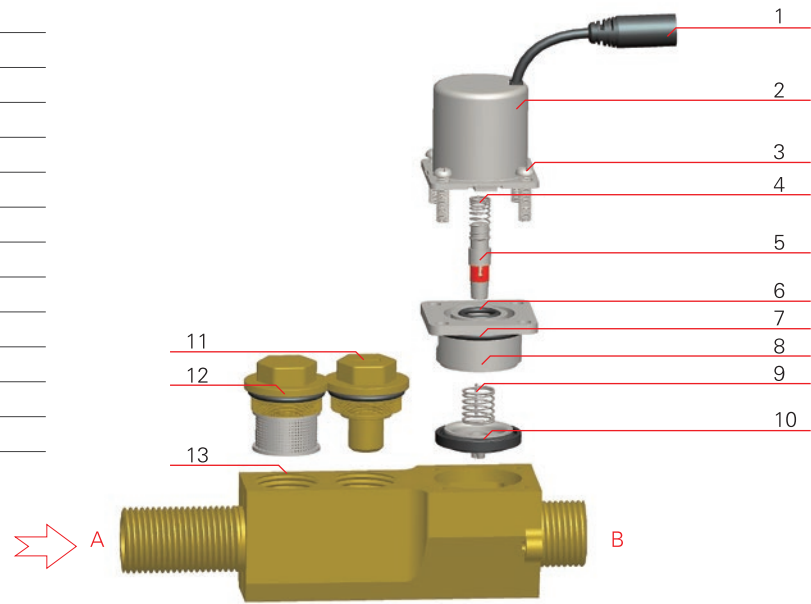

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：YTH-B180/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：YTH-B180;②电压：DC 6V;
③开关型式：直流脉冲式;④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: YTH - B180/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: YTH - B180; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.




暗装小冲脉冲阀/小冲一体化脉冲阀系列

Concealed small infra red pulse valve / small punch integrated pulse valve series

Model: YTH-C


外形尺寸图 Size of installation

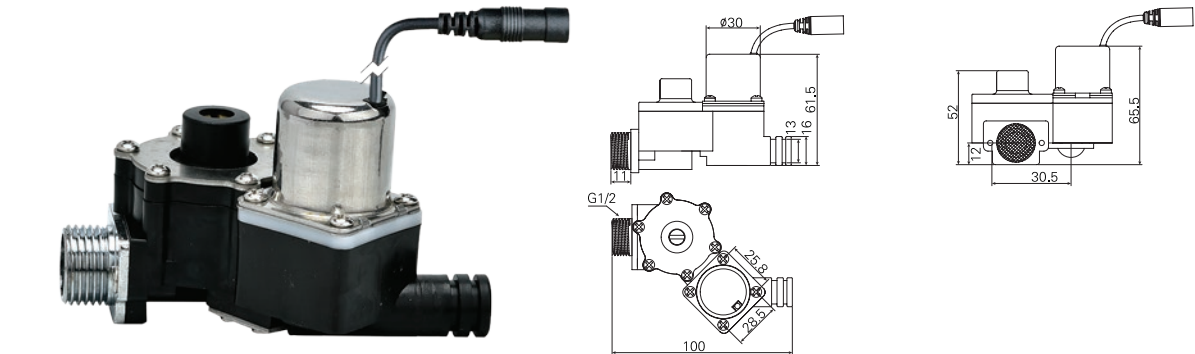


零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	流量调节开关	Flow regulatiang switch
12	过滤组件	Filtering component
13	阀体	Valve body
14	进水管件	Inlet pipe pieces

产品分解图 Stucture Diagram

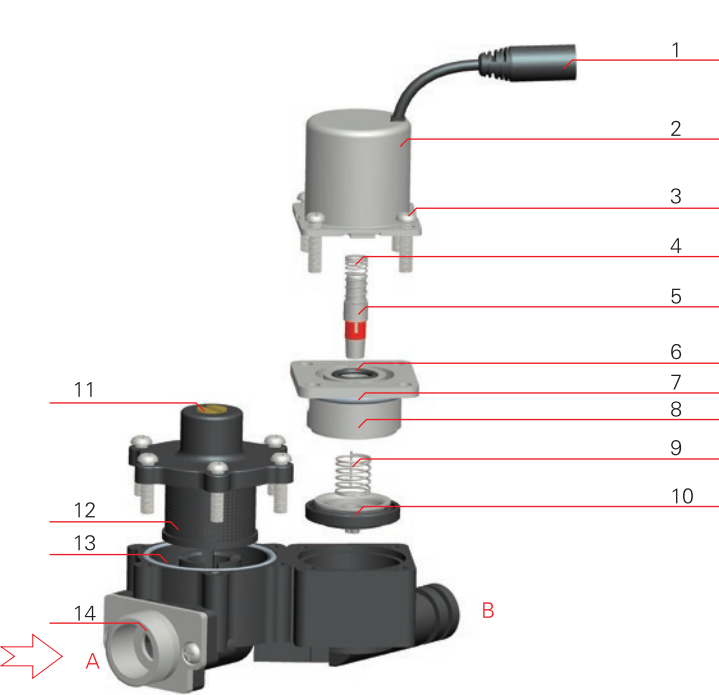

inlet（进水口）

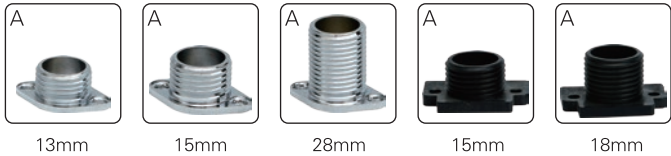

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：YTH-C/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：YTH-C ;②电压：DC 6V；
③开关型式： 直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note


When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: YTH - C/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: YTH - C; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

- ☒ 杂质自清
- ☒ 防堵性能
- ☒ 寿命长
- ☒ 红外线感应
- ☒ 节水环保



Model: YTH-D180



外形尺寸图 Size of installation

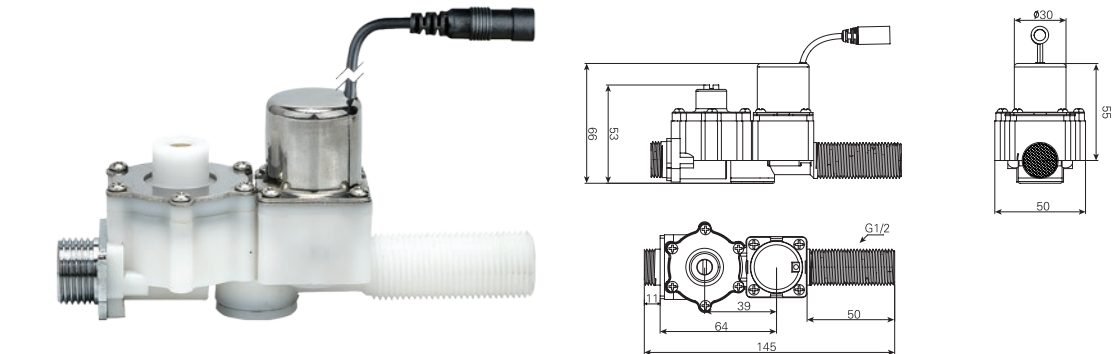

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	流量调节开关	Flow regulatiang switch
12	过滤组件	Filtering component
13	阀体	Valve body
14	进水管件	Inlet pipe pieces

产品分解图 Stucture Diagram

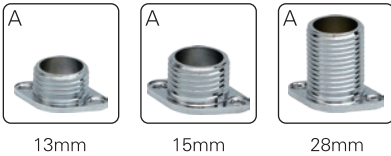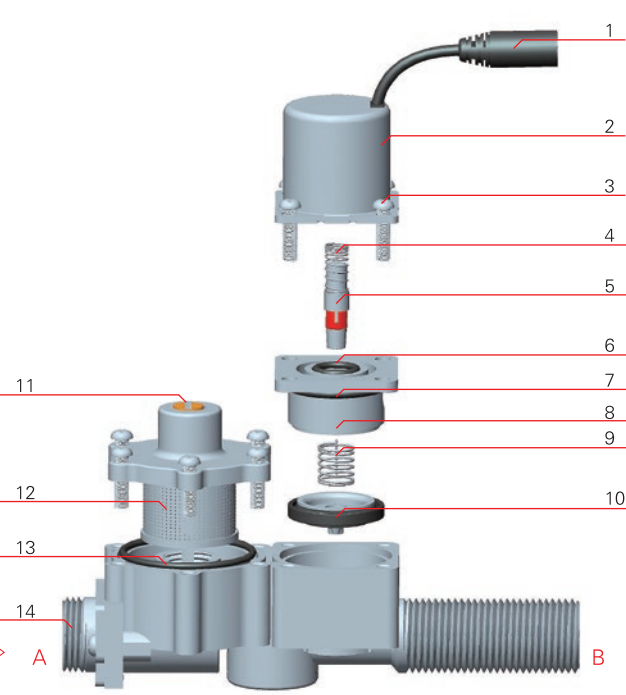

订货须知

1、用户在订货时，请根据“型号含义”，注明所需产品具体型号规格和数量。
型号：YTH-D180/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号：YTH-D180;②电压：DC 6V；
③开关型式： 直流脉冲式；④引出线类型：二芯防水线A端；
2、如用户有特殊要求，请在订购时详细指明。

Note

When ordering, please specify the specifications and quantity of the requi infra red product according to the "model meaning".
Type: YTH - D180/DC 6V/DC pulse type two-core waterproof wire A.
The figure of this model is the following: type: YTH - D180; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

360° 安全无忧

用的放心 是我的硬性指标

- ✓杂质自清
- ✓防堵性能
- ✓红外线感应
- ✓寿命长
- ✓节水环保



综合概述

应用于自动控制系统中:红外线感应洁具流体开关控制, 内部利用两个型腔进行减压控制, 增强了阀的可靠性和使用寿命, 缩短了最高最低压力下阀开关所需的脉冲宽度, 独特的杂质自清功能, 使其具有优越的防堵性能。采用一进一出的形式, 完成自动冲水功能。

Summary

Used in the automatic control system, infrared induction sanitary ware fluid, switch control, internal use of two cavity pressure control, enhanced the reliability of the valve and service life, reduces the maximum and minimum pressure valve switch is needed for the pulse width, the unique impurities self-cleaning function, make it has held in superior performance.The automatic flushing function is achieved by adopting one in one.



陶瓷一体化脉冲阀系列 Ceramic integrated pulse valve series




技术指标参数 Technical Feature & Parameter

★ 使用说明 Instruction

额定脉冲电压 Rated voltage	DC6V
线圈电阻 Coil resistance	17Ω±0.5Ω(20°C)
最低电流 Min Current	320mA
脉冲宽度 Pulse width	30-50ms
工作压力 Operating pressure	0.02Mpa~0.8Mpa
介质温度 Media temperature	1°C~75°C
响应时间 Responding time	开≤0.15s关≤0.5s open≤0.15s close≤0.5s

★ 压力与流量的关系 Relation between pressure and flow rate

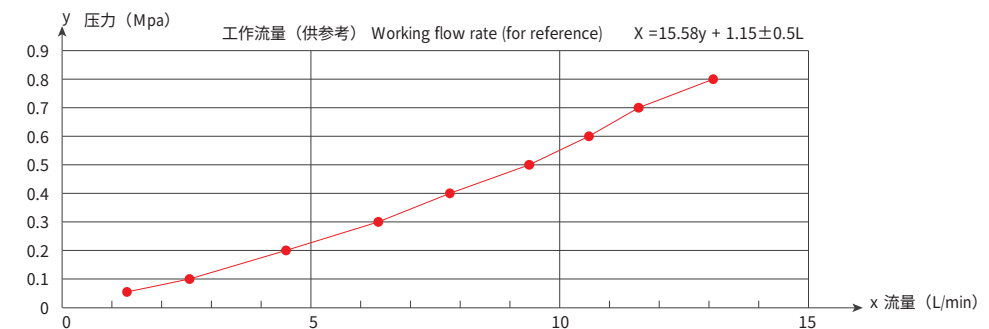

压力(MPa) Pressure (MPa)	0.05	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
流量平均值(KG/min) Average flow rare(KG/min)	1.3	2.56	4.5	6.36	7.8	9.4	10.6	11.6	13.1

强度试验The strength test	静压1.6MPa Static pressure		耐水压 Withstand voltage pressure	1.2Mpa/5min
空载测试 No - load test	Voltage V*3.6(电压),Pulse width 50ms(脉冲宽度)		允许限压(电压) Permissiblelimiting voltage	V*1.15
高压启动与关闭 High water pressure startup and closing	水压0.8Mpa, 电压DC4.5V, 脉冲宽度50ms,电磁阀能正常启动与关闭 At water pressure 0.8Mpa.voltage DC4.5V,pulse width 50ms,the solenoid valve can be started closed normally			
低压启动与关闭 Low water pressure startup and closing	水压0.02Mpa, 电压DC4.5V, 脉冲宽度50ms,电磁阀能正常启动与关闭 At water pressure 0.02Mpa.voltage DC4.5V,pulse width 50ms,the solenoid valve can be startde and closed normally			
高压压泄漏量Leakage upon high water pressure	1.2Mpa无泄漏 1.2Mpa zero leakage			
低压压泄漏量Leakage upon low water pressure	0.02Mpa泄漏量≤0.1mL/min 0.02Mpa leakage ≤0.1 mL/min			
电气强度Electric strength	导电部分与安装孔及非导电金属之间应能承受500v/50Hz,漏电流0.75mA,1 min耐压而无击穿现象 Among the conductive part,mounting hole and nonconductive metal,it can withstand 500V/50Hz leakage current 0.75mA for 1min without the breakdown			
绝缘电阻Insulation resistance	用500V兆欧表测试导电部分与非导电金属之间的电阻≥20 M Ω The resistance between the charged part and nonconductive metallic part tested by the megohmmeter of 500V≥20M Ω			
密封试验Sealing test	Static pressure静压	空气 Air	高压 High pressure	1 MPa
			低压 Low pressure	0 .02MPa
		冷水 Cold water	高压 High pressure	1 .2MPa
			低压 Low pressure	0 .02MPa
		热水 Hot water	高压 High pressure	0 .8MPa
			低压 Low pressure	0 .02MPa
使用寿命试验Service life	≥ Min 1,000,000 cycles (CJ/T 194 - 2004) ≥1,000,000周期；符合CJ/T194 - 2004要求			


★ 工作环境要求 Requirements of working environment

工作环境温度 Temp.of working environment	1°C~+60°C	允许限压(水压) Permissible limiting pressure (water pressure)	≤1.2Mpa
工作环境湿度 Humidity of working environment	35%~90%RH(无结露状态) 35%~90%RH(No condensation state)	安装方向 Mounting direction	垂直方向, 倾斜度不超过60度 It is mounted in vertical direction, the inclination doesn't exceed 60 degrees
保存温度 Storage temp	-5~+80°C(无结冰状态) -5~+80°C(No freezing state)		
保存湿度 Storage humidity	25%~95%RH(无结露状态) 25%~95%RH(No condensation state)		

Model : TCF-A




外形尺寸图 Size of installation

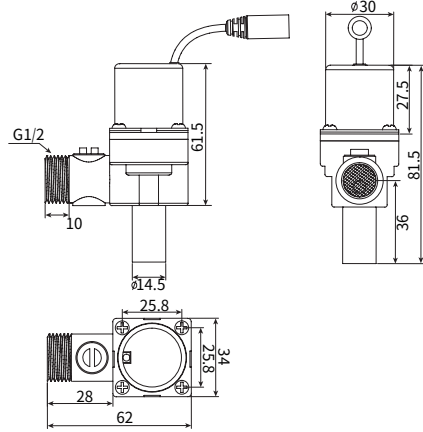

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	O型圈	O-rings
11	流量调节开关	Flow regulating switch
12	阀体	Valve body

产品分解图 Stucture Diagram

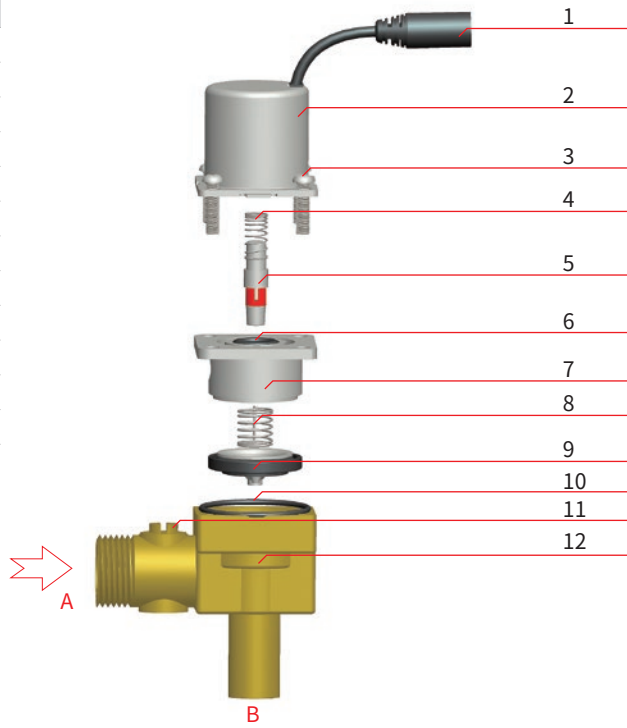

inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号: TCF-A/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号: TCF-A; ②电压DC 6V;
③开关型式：直流脉冲式; ④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note


When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: TCF - A/DC 6V/DC pulse type two-core waterproof lineA.
The figure of this model is the following: type: TCF - A; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail whenordering.



Model : TCF-B




外形尺寸图 Size of installation

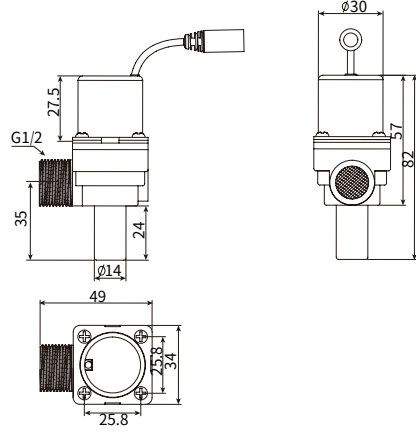

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body

产品分解图 Stucture Diagram

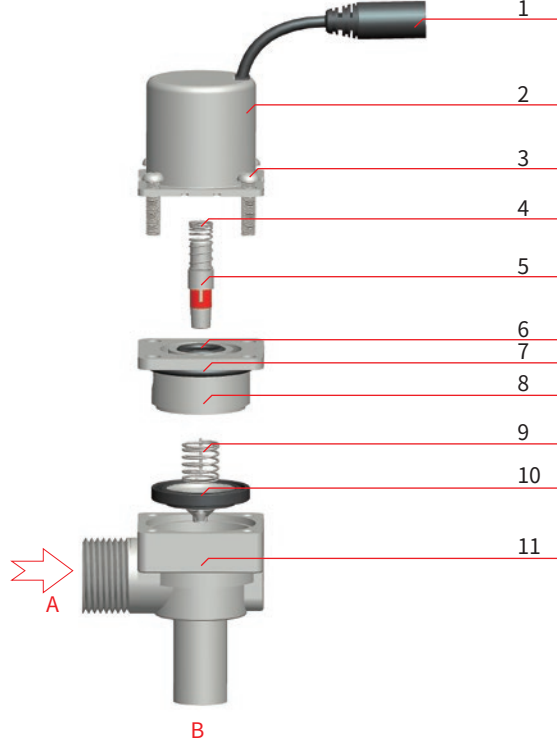


inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号: TCF-B/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号: TCF-B; ②电压DC 6V;
③开关型式：直流脉冲式; ④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。

Note


When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: TCF - B/DC 6V/DC pulse type two-core waterproof line A.
The figure of this model is the following: type: TCF - B; Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail whenordering.

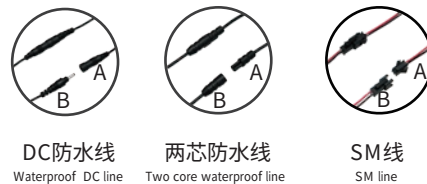

Model : TCF-C





外形尺寸图 Size of installation

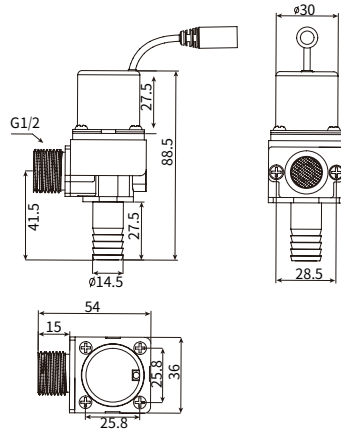

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4 - M4	Screw 4 - M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O - rings
7	O型圈	O - rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	阀体	Valve body
12	进水管件	Inlet pipe pieces
13	出水管件	Water pipe fittings

产品分解图 Stucture Diagram

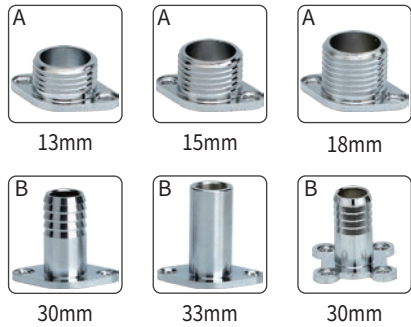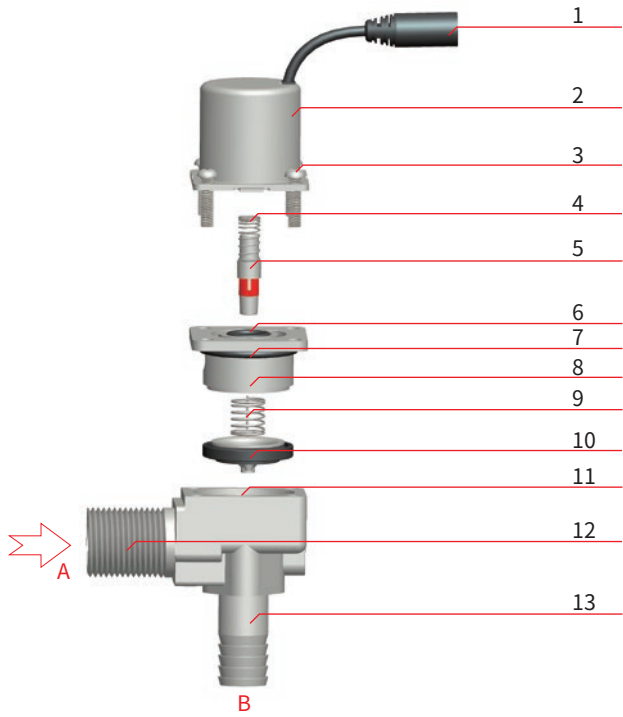

订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号: TCF - C/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号: TCF - C; ②电压DC 6V;
③开关型式: 直流脉冲式; ④引出线类型: 二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。


Note

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: TCF - C/DC 6V/DC pulse type two - core waterproof line A.
The figure of this model is the following: type: TCF - C; Voltage: DC6V;
Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
If the user has special request, please specify in detail when ordering.

Model : TCF-D






外形尺寸图 Size of installation

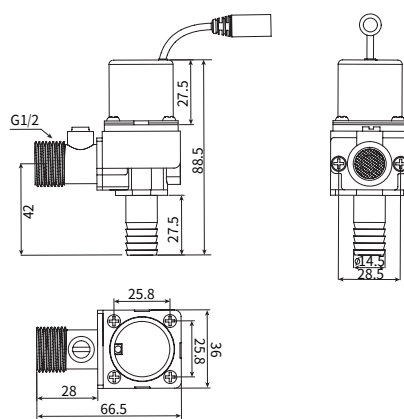

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4 - M4	Screw 4 - M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O - rings
7	O型圈	O - rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	流量调节开关	Flow regulating switch
12	进水管件	Inlet pipe pieces
13	阀体	Valve body
14	出水管件	Water pipe fittings

产品分解图 Stucture Diagram

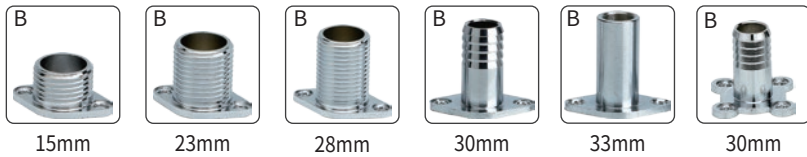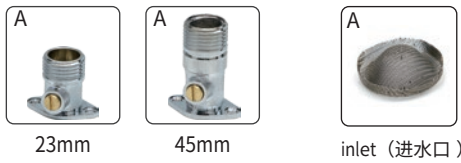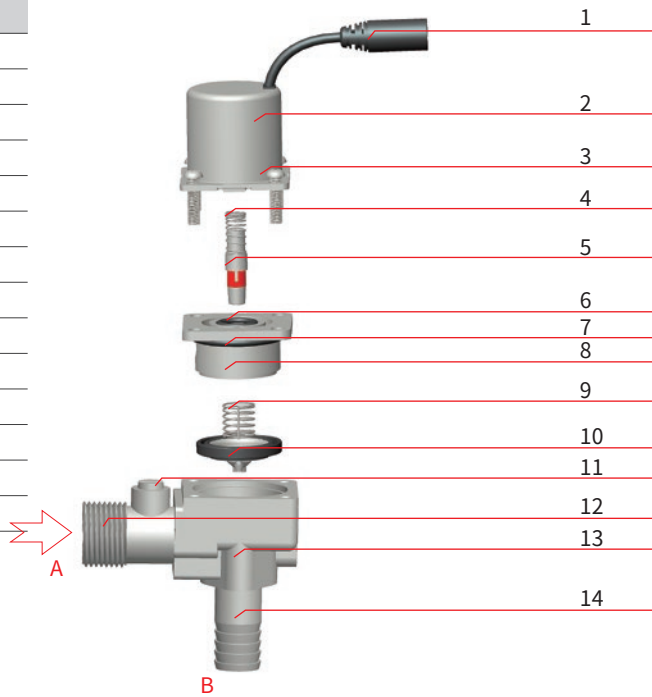

订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号: TCF - D/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号: TCF - D; ②电压DC 6V;
③开关型式: 直流脉冲式; ④引出线类型: 二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。


Note

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: TCF - D/DC 6V/DC pulse type two - core waterproof line A.
The figure of this model is the following: type: TCF - D; Voltage: DC6V;
Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
If the user has special request, please specify in detail when ordering.



Model : TCF-E


外形尺寸图 Size of installation

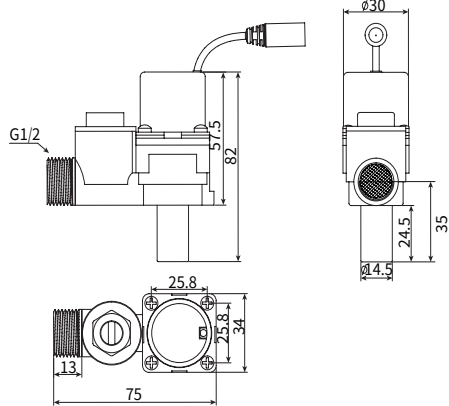

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4 - M4	Screw 4 - M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O - rings
7	流量调节开关	Flow regulating switch
8	阀盖	Cover
9	过滤流量调节组件	Filter the flnot W Control component
10	自清洗弹簧	Since the spring cleaning
11	膜片组件	Diaphragm components
12	O型圈	O - rings
13	阀体	Valve body

产品分解图 Stucture Diagram

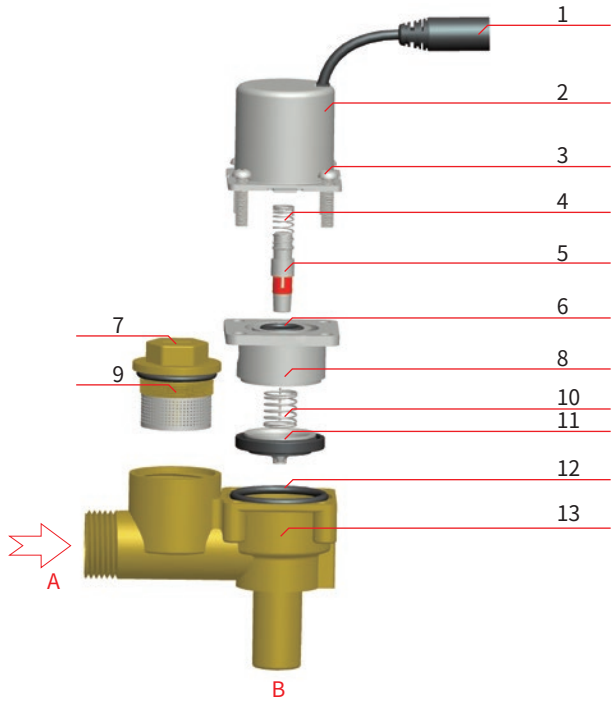

订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号: TCF - E/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号: TCF - E, ②电压DC 6V;
③开关型式：直流脉冲式; ④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。


Note

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: TCF - E/DC 6V/DC pulse type two - core waterproof line A.
The figure of this model is the following: type: TCF - E; Voltage: DC6V;
Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
If the user has special request, please specify in detail when ordering.

- ☑ 杂质自清
- ☑ 防堵性能
- ☑ 寿命长
- ☑ 红外线感应
- ☑ 节水环保

Model : TCF-F


外形尺寸图 Size of installation

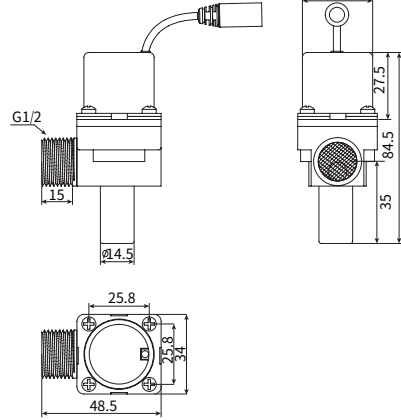

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4 - M4	Screw 4 - M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O - rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	O型圈	O - rings
11	阀体	Valve body

产品分解图 Stucture Diagram

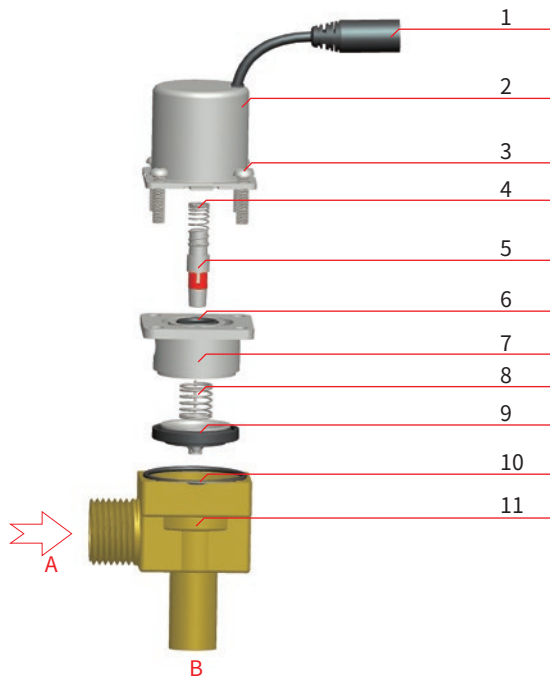

inlet (进水口)



订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
型号: TCF - F/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下：①型号: TCF - F, ②电压DC 6V;
③开关型式：直流脉冲式; ④引出线类型：二芯防水线A端;
2、如用户有特殊要求，请在订购时详细指明。


Note

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: TCF - F/DC 6V/DC pulse type two - core waterproof line A.
The figure of this model is the following: type: TCF - F; Voltage: DC6V;
Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
If the user has special request, please specify in detail when ordering.

Model : TCF-G




外形尺寸图 Size of installation

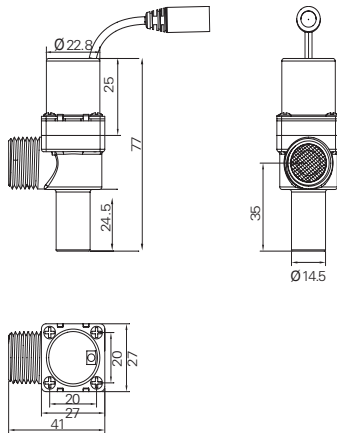

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4 - M4	Screw 4 - M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O - rings
7	流量调节开关	Flow regulating switch
8	阀盖	Cover
9	过滤流量调节组件	Filter the fnlot W Control component
10	自清洗弹簧	Since the spring cleaning
11	膜片组件	Diaphragm components
12	O型圈	O - rings
13	阀体	Valve body

产品分解图 Stucture Diagram

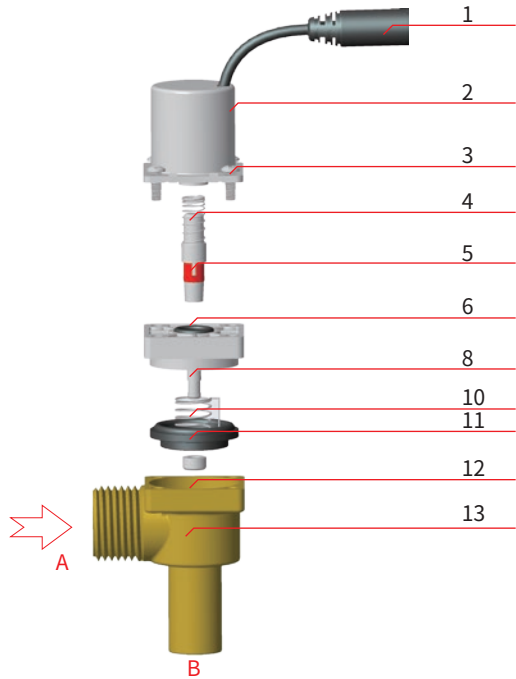

inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
 型号: TCF - G/DC 6V/直流脉冲式二芯防水线A端。
 此型号具体含义如下：①型号: TCF - G, ②电压DC 6V;
 ③开关型式：直流脉冲式; ④引出线类型：二芯防水线A端;
 2、如用户有特殊要求，请在订购时详细指明。




Note

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
 Type: TCF - G/DC 6V/DC pulse type two - core waterproof line A.
 The figure of this model is the following: type: TCF - G; Voltage: DC6V;
 Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
 If the user has special request, please specify in detail when ordering.

Model : TCF-H




外形尺寸图 Size of installation

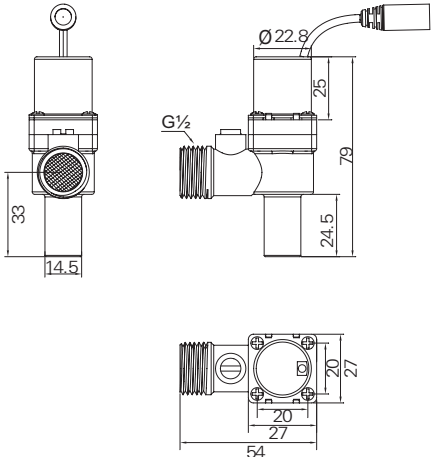

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4 - M4	Screw 4 - M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O - rings
7	阀盖	Cover
8	自清洗弹簧	Since the spring cleaning
9	膜片组件	Diaphragm components
10	O型圈	O - rings
11	阀体	Valve body

产品分解图 Stucture Diagram

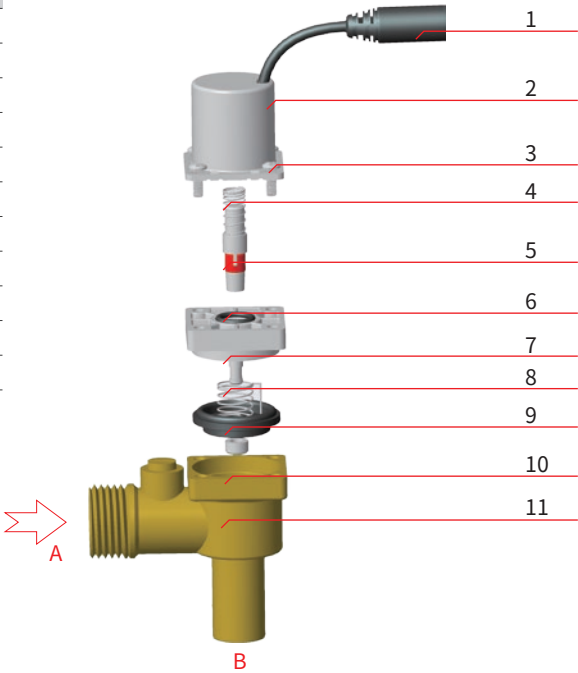

inlet (进水口)

订货须知

1、用户在订货时，请根据“型号含义”注明所需产品具体型号规格和数量。
 型号: TCF - H/DC 6V/直流脉冲式二芯防水线A端。
 此型号具体含义如下：①型号: TCF - H, ②电压DC 6V;
 ③开关型式：直流脉冲式; ④引出线类型：二芯防水线A端;
 2、如用户有特殊要求，请在订购时详细指明。



Note

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
 Type: TCF - H/DC 6V/DC pulse type two - core waterproof line A.
 The figure of this model is the following: type: TCF - H; Voltage: DC6V;
 Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
 If the user has special request, please specify in detail when ordering.



360° 安全无忧

用的放心
是我的硬性指标

- ✓杂质自清
- ✓防堵性能
- ✓红外线感应
- ✓寿命长
- ✓节水环保

综合概述

应用于自动控制系统中:红外线感应洁具流体开关控制，内部利用两个型腔进行减压控制，增强了阀的可靠性和使用寿命，缩短了最高最低压力下阀开关所需的脉冲宽度，独特的杂质自清功能，使其具有优越的防堵性能。采用一进一出的形式，设计手动、自动冲水功能，解决了用户顾虑，满足了产品的个性化需求。

Summary


Used in the automatic control system, infrared induction sanitary ware fluid, switch control, internal use of two cavity pressure control, enhanced the reliability of the valve and service life, reduces the maximum and minimum pressure valve switch is needed for the pulse width, the unique impurities self-cleaning function, make it has held in superior performance.The design manual, automatic flushing function is adopted in the form of the first step ,which solves the user ' s concern and satisfise the personalized demand of the product.

技术指标参数 Technical Feature & Parameter

★ 使用说明 Instruction

额定脉冲电压 Rated voltage	DC 6V
线圈电阻 Coil resistance	17Ω±0.5Ω(20℃)
最低电流 Min Current	320mA
脉冲宽度 Pulse width	30 - 50ms
工作压力 Operating pressure	0 .02Mpa~0.8Mpa
介质温度 Media temperature	1℃~75℃
响应时间 Responding time	开≤ 0.15s关≤0.5s open≤0.15s close≤0.5s

★ 压力与流量的关系
Relation between pressure
and flow rate

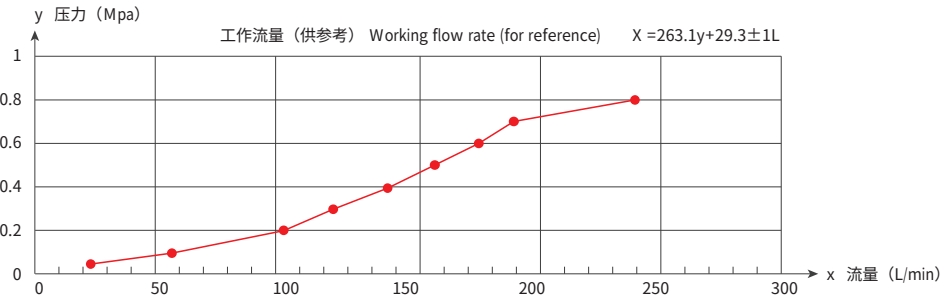

压力(MPa) Pressure (MPa)	0.05	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
流量平均值(KG/min) Average flow rare(KG/min)	24	56.4	100.8	122.4	142.8	162	178.8	193.2	242

★ 性能试验 Performance test


强度试验 The strength test	静压 1.6MPa Static pressure		耐水压 Withstand voltage pressure		1.2Mpa/5min
空载测试 No - load test	Voltage V*3.6(电压) Pulse width 50ms(脉冲宽度)		允许限压(电压) Permissible limiting voltage		V*1.15
高水压启动与关闭 High water pressure startup and closing	水压0.8Mpa，电压DC4.5V，脉冲宽度50ms，电磁阀能正常启动与关闭 At water pressure 0.8Mpa, voltage DC4.5V, pulse width 50ms,the solenoid valve can be started and closed normally				
低水压启动与关闭 Low water pressure startup and closing	水压0.02Mpa，电压DC4.5V，脉冲宽度50ms，电磁阀能正常启动与关闭 At water pressure 0.02Mpa, voltage DC4.5V, pulse width 50ms,the solenoid valve can be started and closed normally				
高水压泄漏量 Leakage upon high water pressure	1.2 Mpa 无泄漏 1.2Mpa zero leakage				
低水压泄漏量 Leakage upon low water pressure	0.02Mpa泄漏量≤0.1mL/min 0.02Mpa leakage ≤0.1 mL/min				
电气强度 Electric strength	导电部分与安装孔及非导电盒盖之间能承受500v/50Hz，漏电流0.75mA，1 min耐压而无击穿现象 Among the conductive part,mounting hole and nonconductive metal,it can withstand 500V/50Hz leakage current 0.75mA for 1 min without the breakdown				
绝缘电阻 Insulation resistance	用500V兆欧表测试导电部分与非导电金属之间的电阻≥20M Ω The resistance between the charged part and nonconductive metallic part tested by the megohmmeter of 500V≥20M Ω				
密封试验 Sealing test	Static pressure 静压	空气 Air	高压 High pressure	1 MPa	
			低压 Low pressure	0.02 MPa	
		冷水 Cold water	高压 High pressure	1.2 MPa	
			低压 Low pressure	0.02 MPa	
		热水 Hot water	高压 High pressure	0.8 MPa	
			低压 Low pressure	0.02 MPa	
使用寿命试验 Service life	≥ Min 1,000,000 cycles (CJ/T194 - 2004) ≥1, 000, 000 周期；符合CJ/T194 - 2004要求				

★ 工作环境要求 Requirements of working environment

工作环境温度 Temp.of working envlron mlent	1℃~+60℃	允许限压（水压） Permissible limiting pressure (water pressure)	≤1.2Mpa
工作环境湿度 Humidity of working environment	35% - 90%RH(无结露状态) 35% - 90%RH(No condensation state)	安装方向 Mounting direction	垂直方向，倾斜度不超过60度 It is mounted in vertical direction , the inclination doesn't exceed 60 degrees
保存温度 Storage temp	- 5~ +80℃ (无结冰状态) - 5~ +80℃ (No freezing state)	最低水压 Water pressure	0.2Mpa
保存湿度 Storage humidity	25%~ 95%RH(无结露状态) 25%~ 95%RH(No condensation state)		

Model: DCF-A


外形尺寸图 Size of installation

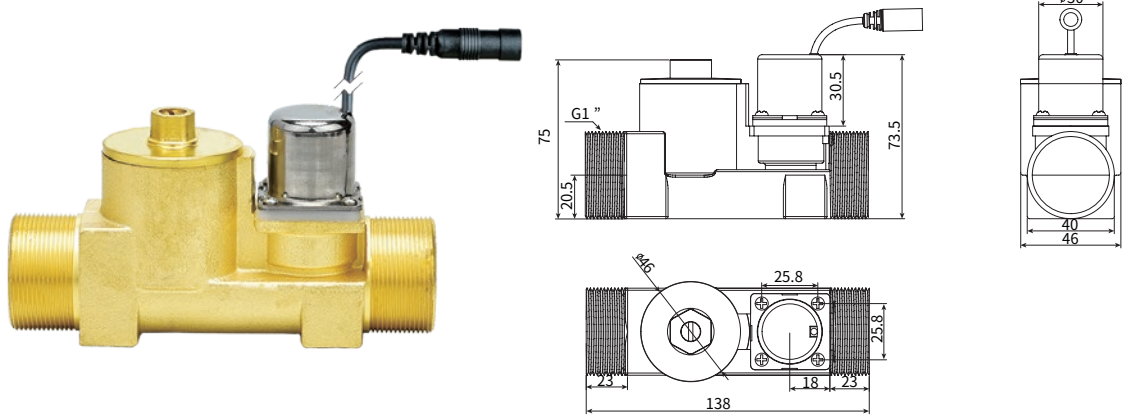

零部件名称 Accessories

产品分解图 Stucture Diagram

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4 - M4	Screw4 - M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O - rings
7	O型圈	O - rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	控制阀体	Control Valve body
12	流量调节开关	Flow regulating switch
13	主阀盖	Water pipe fittings
14	O型圈	O - rings
15	主弹簧	Main spring
16	主阀芯	Main valve core
17	主阀体	Main body

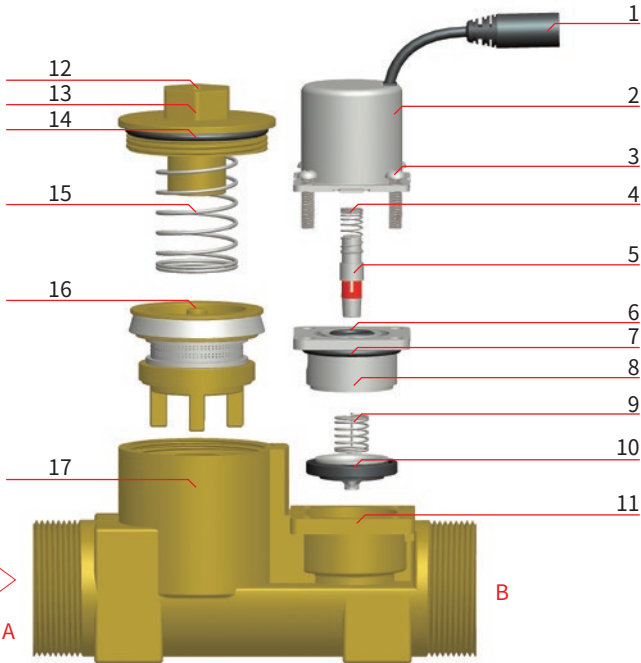

订货须知

1、用户在订货时，请根据'型号含义'注明所需产品具体型号规格和数量。
型号：DCF - A/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下①型号：DCF - A；②电压：DC 6V；
③开关型式：直流脉冲式，④引出线类型：二芯防水线A端，
2、如用户有特殊要求，请在订购时详细指明。


NoTe

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Model: DCF - A/DC 6V/DC pulse type two - core waterproof wire A.
This model has the following meaning: Voltage:DC 6V;
Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
If the user has special request, please specify in detail when ordering.

- ☑ 杂质自清
- ☑ 防堵性能
- ☑ 寿命长
- ☑ 红外线感应
- ☑ 节水环保

Model: DCF-B



外形尺寸图 Size of installation

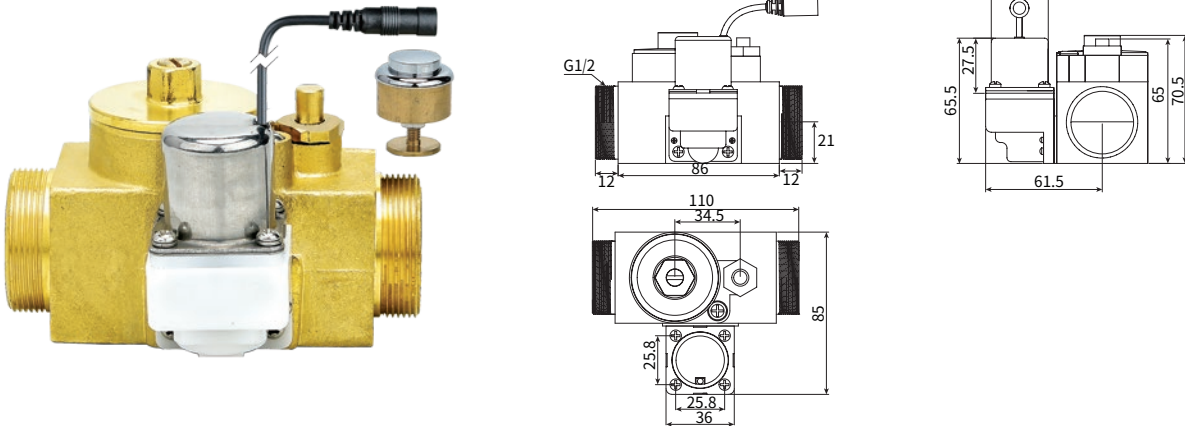

零部件名称 Accessories

产品分解图 Stucture Diagram

序号NO.	名称	Name
1	电源键	Power cord
2	线圈组件	Coil components
3	螺钉4 - M4	Screw4 - M4
4	手动按钮组件	Manual button assembly
5	动阀芯弹簧	Acting valve core spring
6	O型圈	O - rings
7	动阀芯组件	Movable valve core components
8	O型圈	O - rings
9	O型圈	O - rings
10	阀盖	Cover
11	自清洗弹簧	Since the spring clean ing
12	膜件组件	Diaphragm components
13	控制阀体	Control valve body
14	流量调节开关	Flow regulating switch
15	主阀盖	Main valve cover
16	O型圈	O - rings
17	主弹簧	Main spring
18	主阀芯	Main valve core
19	主阀体	Main body

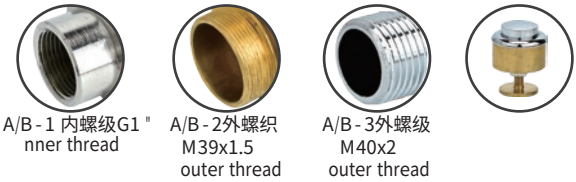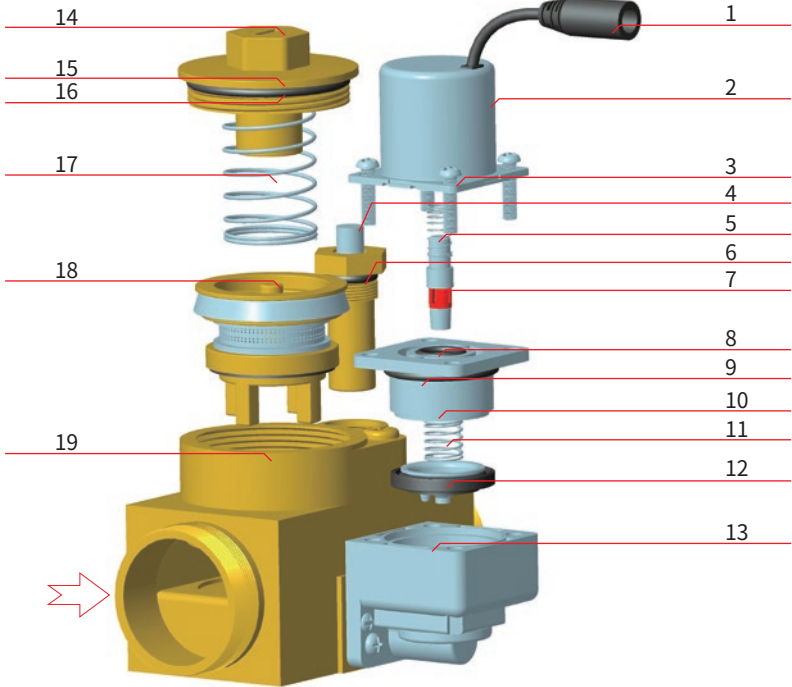


订货须知

1、用户在订货时，请根据'型号含义'注明所需产品具体型号规格和数量。
型号：DCF - B/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下①型号：DCF - B；②电压：DC 6V；
③开关型式：直流脉冲式，④引出线类型：二芯防水线A端，
2、如用户有特殊要求，请在订购时详细指明。


NoTe

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Model: DCF - B/DC 6V/DC pulse type two - core waterproof wire A.
This model has the following meaning: the type: DCF - B;Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
If the user has special request, please specify in detail when ordering.

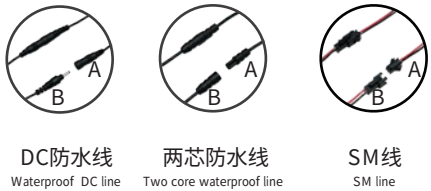

Model: DCF-C



外形尺寸图 Size of installation

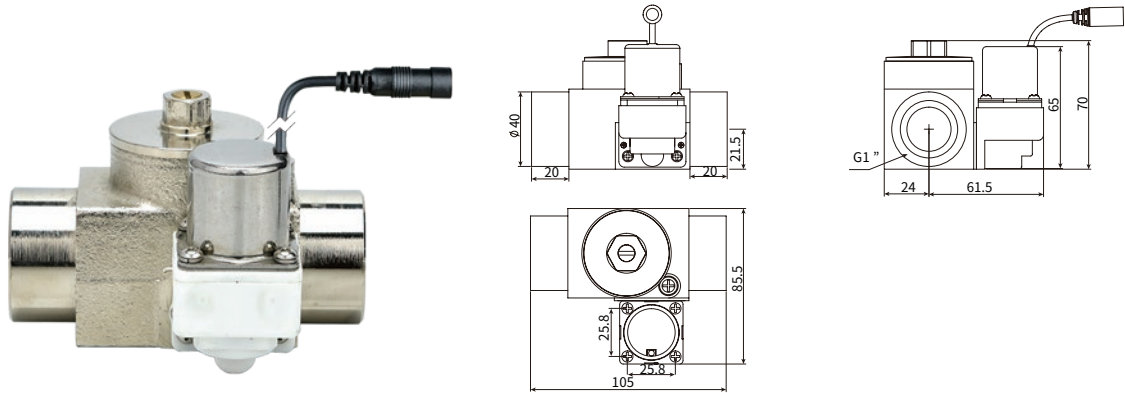

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	控制阀体	Control Valve body
12	流量调节开关	Flow regulating switch
13	主阀盖	Main valve cover
14	O型圈	O-rings
15	主弹簧	Main spring
16	主阀芯	Main valve core
17	主阀体	Main body

产品分解图 Stucture Diagram

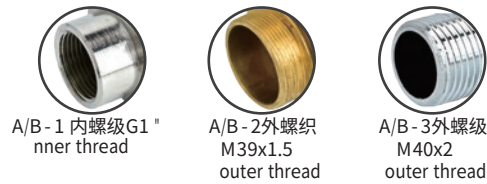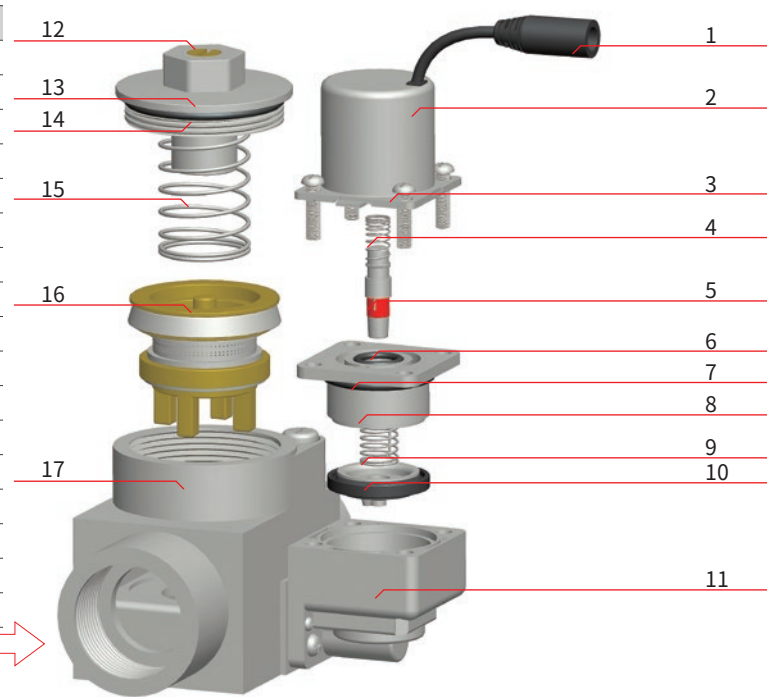


订货须知

1、用户在订货时，请根据"型号含义"注明所需产品具体型号规格和数量。
型号：DCF - C/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下①型号：DCF - C；②电压：DC 6V；
③开关型式：直流脉冲式，④引出线类型：二芯防水线A端，
2、如用户有特殊要求，请在订购时详细指明。


NoTe

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: DCF - C/DC 6V/DC pulse type two-core waterproof wireA.
This model has the following meaning: the type: DCF - C;Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

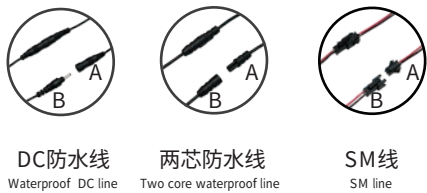

Model: DCF-D


外形尺寸图 Size of installation

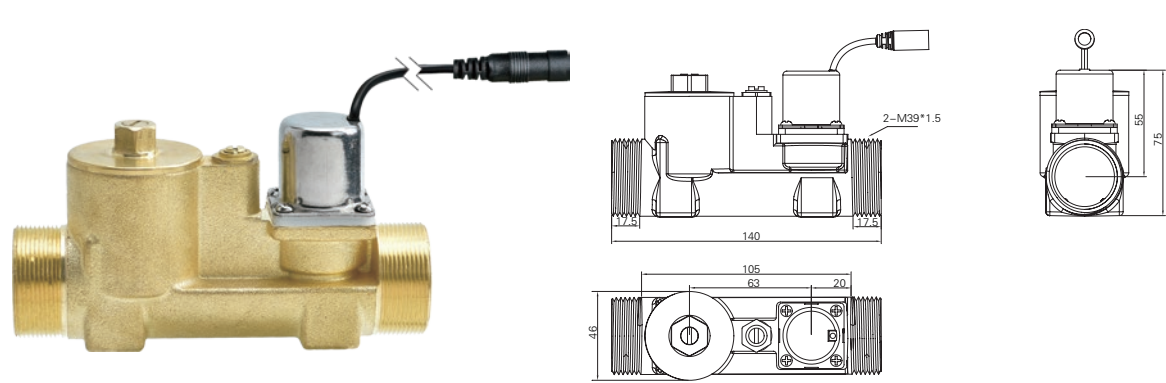

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4-M4	Screw 4-M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O-rings
7	O型圈	O-rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	流量调节开关	Flow regulating switch
12	主阀盖	Main valve cover
13	O型圈	O-rings
14	主弹簧	Main spring
15	主阀芯	Main valve core
16	流量调节开关	Flow regulating switch
17	主阀体	Main body

产品分解图 Stucture Diagram

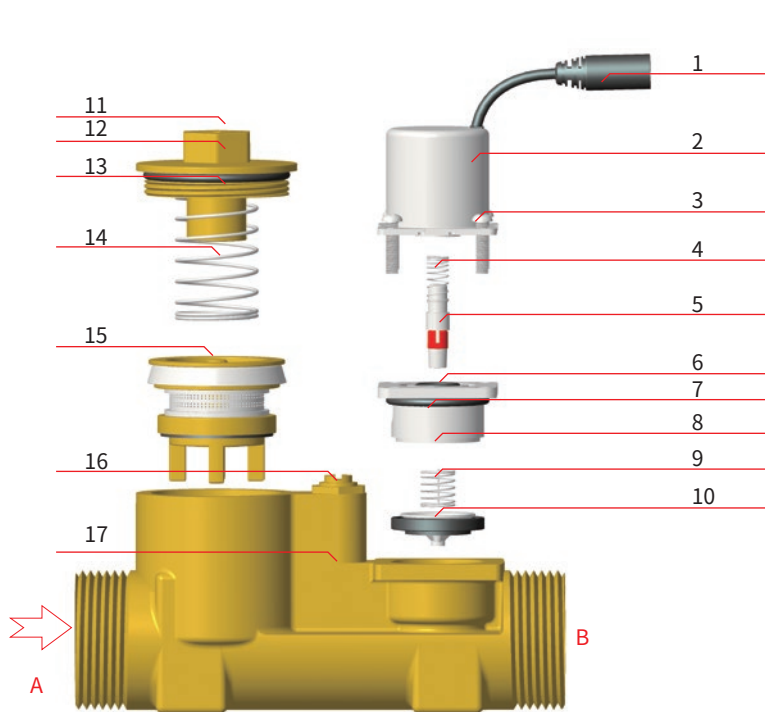


订货须知

1、用户在订货时，请根据"型号含义"注明所需产品具体型号规格和数量。
型号：DCF - D/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下①型号：DCF - D；②电压：DC 6V；
③开关型式：直流脉冲式，④引出线类型：二芯防水线A端，
2、如用户有特殊要求，请在订购时详细指明。


NoTe

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: DCF - D/DC 6V/DC pulse type two-core waterproof wireA.
This model has the following meaning: the type: DCF - D;Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

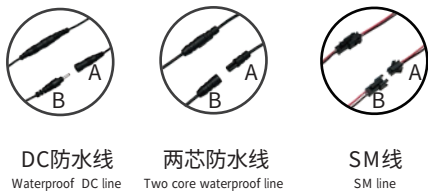

Model: DCF-E



外形尺寸图 Size of installation

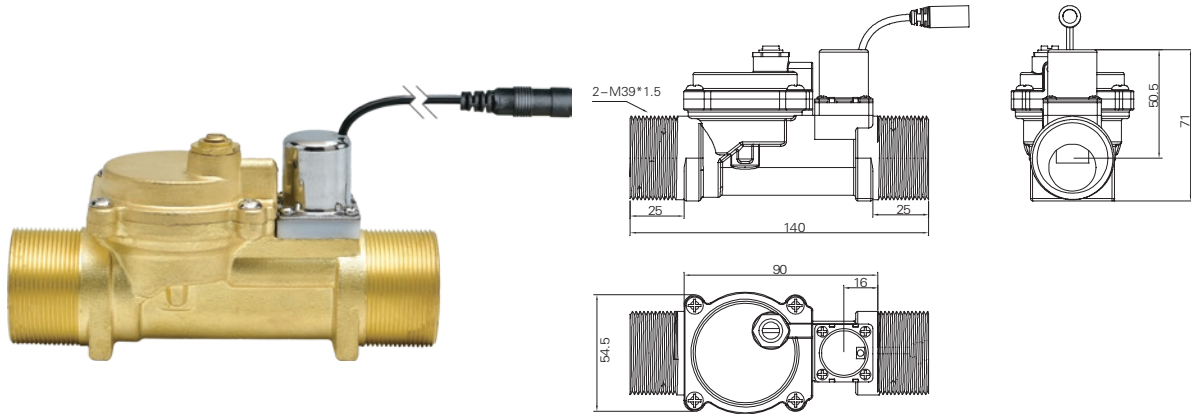


零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4- M4	Screw 4- M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O - rings
7	O型圈	O - rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	控制阀体	Control Valve body
12	流量调节开关	Flow regulating switch
13	主阀盖	Main valve cover
14	主弹簧	Main spring
15	主膜片组件	Main diaphragm assembly

产品分解图 Stucture Diagram

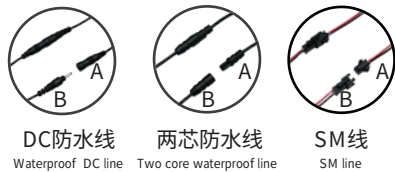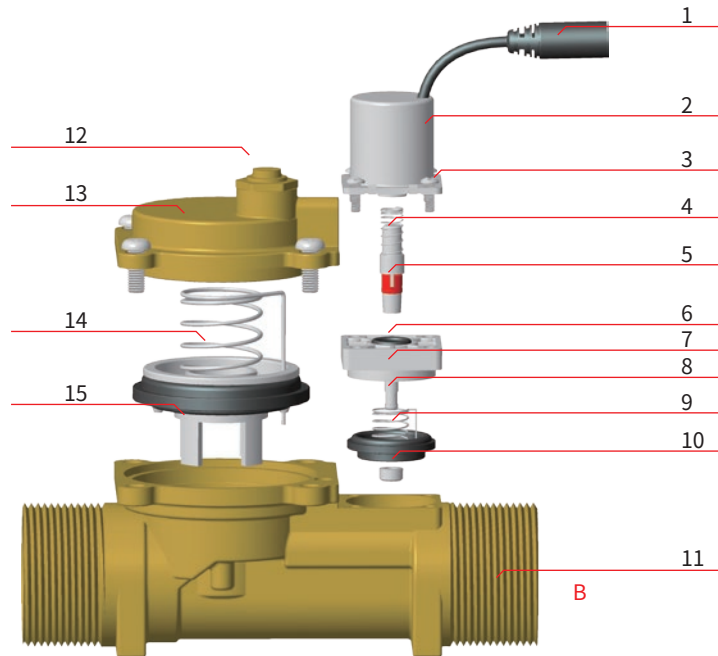

★ 压力与流量的关系
Relation between pressure
and flow rate

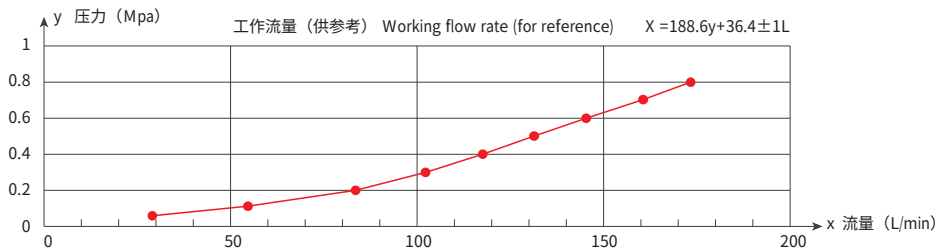

压力(MPa) Pressure (MPa)	0.05	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
流量平均值(KG/min) Average flow rare(KG/min)	30	55.2	84	103.2	118.8	132.5	147	162	175.2

订货须知

- 用户在订货时，请根据"型号含义"注明所需产品具体型号规格和数量。
型号：DCF - E/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下①型号：DCF - E；②电压：DC 6V；
③开关型式：直流脉冲式，④引出线类型：二芯防水线A端，
- 如用户有特殊要求，请在订购时详细指明。


NoTe

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: DCF - E/DC 6V/DC pulse type two - core waterproof wireA.
This model has the following meaning: the type: DCF - E;Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
If the user has special request, please specify in detail when ordering.

- ✓ 杂质自清
- ✓ 防堵性能
- ✓ 寿命长
- ✓ 红外线感应
- ✓ 节水环保

Model: DCF-F


外形尺寸图 Size of installation

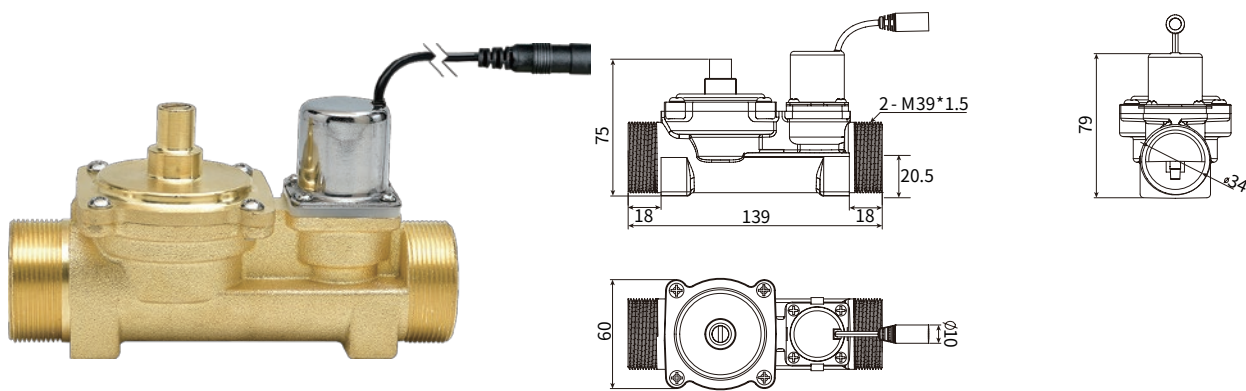

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4- M4	Screw 4- M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O - rings
7	O型圈	O - rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	控制阀体	Control Valve body
12	流量调节开关	Flow regulating switch
13	主阀盖	Main valve cover
14	主弹簧	Main spring
15	主膜片组件	Main diaphragm assembly

产品分解图 Stucture Diagram

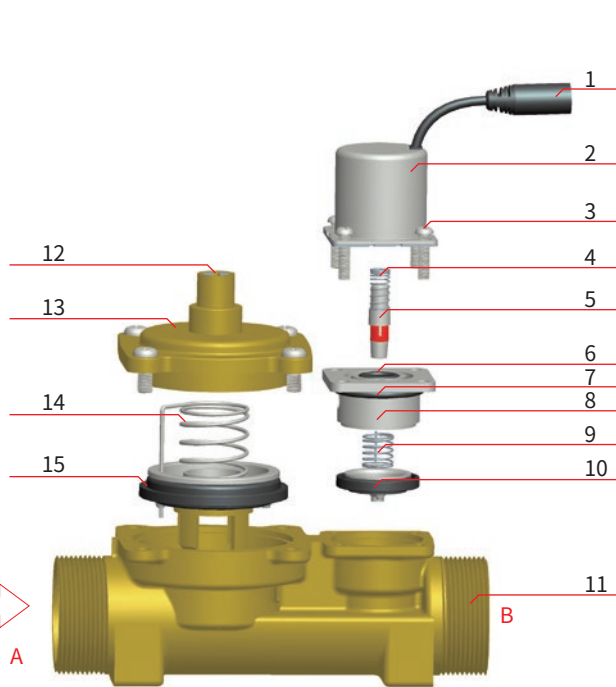

订货须知


- 用户在订货时，请根据"型号含义"注明所需产品具体型号规格和数量。
型号：DCF - F/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下①型号：DCF - F；②电压：DC 6V；
③开关型式：直流脉冲式，④引出线类型：二芯防水线A端，
- 如用户有特殊要求，请在订购时详细指明。

NoTe

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: DCF - F/DC 6V/DC pulse type two - core waterproof wireA.
This model has the following meaning: the type: DCF - F;Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
If the user has special request, please specify in detail when ordering.

Model: DCF-G


外形尺寸图 Size of installation

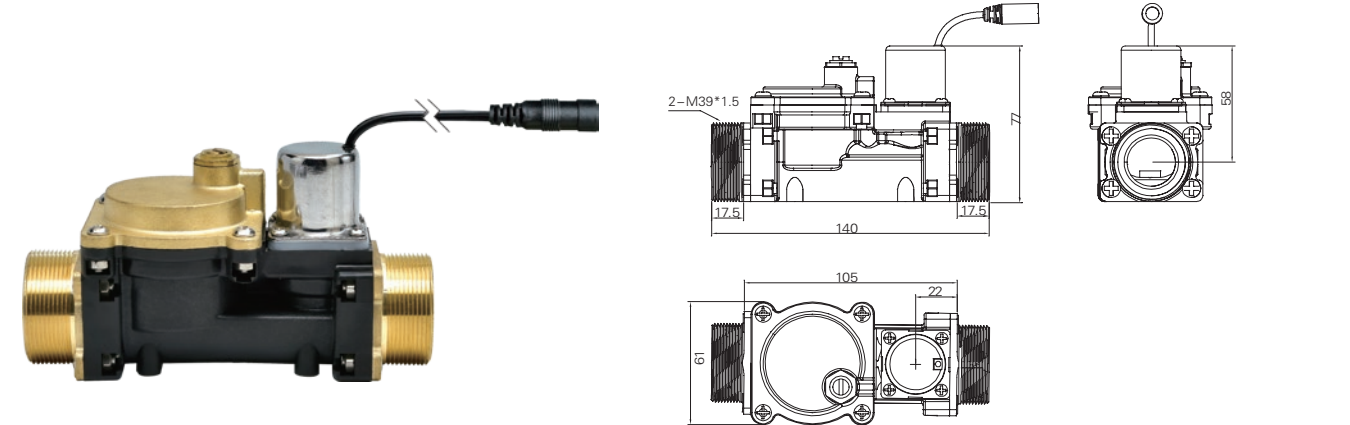

零部件名称 Accessories

序号NO.	名称	Name
1	电源线	Power cord
2	线圈组件	Coil components
3	螺钉4- M4	Screw 4- M4
4	动阀芯弹簧	Acting valve core spring
5	动阀芯组件	Movable valve core components
6	O型圈	O - rings
7	O型圈	O - rings
8	阀盖	Cover
9	自清洗弹簧	Since the spring cleaning
10	膜片组件	Diaphragm components
11	控制阀体	Control Valve body
12	流量调节开关	Flow regulating switch
13	主阀盖	Main valve cover
14	主弹簧	Main spring
15	主膜片组件	Main diaphragm assembly

产品分解图 Stucture Diagram

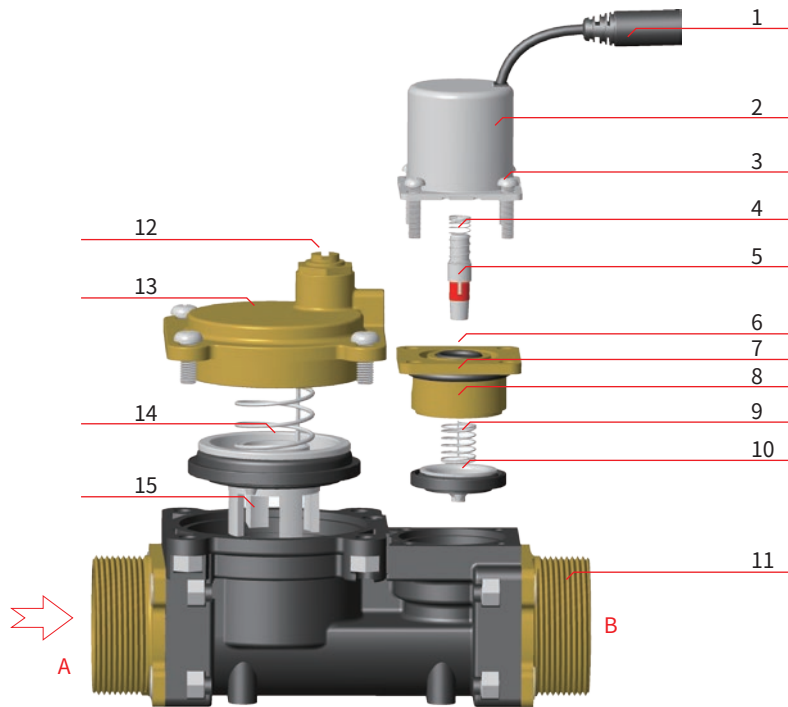

订货须知

1、用户在订货时，请根据"型号含义"注明所需产品具体型号规格和数量。
型号：DCF - G/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下①型号：DCF - G；②电压：DC 6V；
③开关型式：直流脉冲式，④引出线类型：二芯防水线A端，
2、如用户有特殊要求，请在订购时详细指明。

NoTe


When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Type: DCF - G/DC 6V/DC pulse type two - core waterproof wireA.
This model has the following meaning: the type: DCF - G;Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
If the user has special request, please specify in detail when ordering.

- ☑ 杂质自清
- ☑ 防堵性能
- ☑ 寿命长
- ☑ 红外线感应
- ☑ 节水环保

Model: DCF-H



外形尺寸图Size of installation

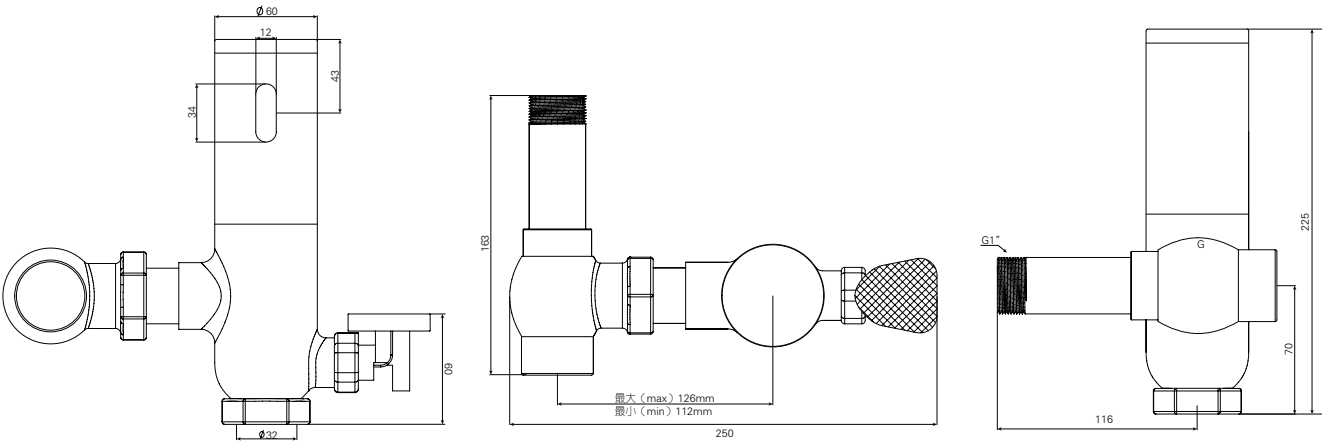

订货须知

1、用户在订货时，请根据"型号含义"注明所需产品具体型号规格和数量。
型号：DCF - H/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下①型号：DCF - H；②电压：DC 6V；
③开关型式：直流脉冲式，④引出线类型：二芯防水线A端，
2、如用户有特殊要求，请在订购时详细指明。


NoTe

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Model: DCF - H/DC 6V/DC pulse type two - core waterproof wireA.
This model has the following meaning: the type: DCF - H;Voltage:DC6V;
Switch type: dc pulse type; The type of line: type: two - core waterproof line A;
If the user has special request, please specify in detail when ordering.

Model: DCF-HS



外形尺寸图Size of installation

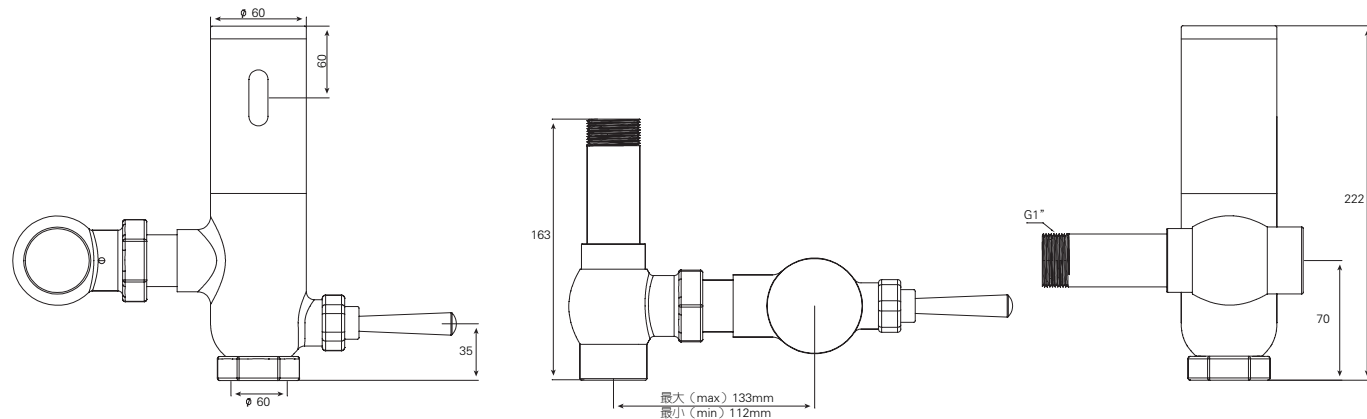

订货须知

- 1、用户在订货时，请根据"型号含义"注明所需产品具体型号规格和数量。
型号：DCF-H/DC 6V/直流脉冲式二芯防水线A端。
此型号具体含义如下①型号：DCF-H；②电压：DC 6V；
③开关型式：直流脉冲式，④引出线类型：二芯防水线A端，
- 2、如用户有特殊要求，请在订购时详细指明。


NoTe

When ordering, please specify the specifications and quantity of the required product according to the "model meaning".
Model: DCF-H/DC 6V/DC pulse type two-core waterproof wireA.
This model has the following meaning: the type: DCF-H; Voltage: DC6V;
Switch type: dc pulse type; The type of line: type: two-core waterproof line A;
If the user has special request, please specify in detail when ordering.

Model: XQ-18




外形尺寸图Size of installation

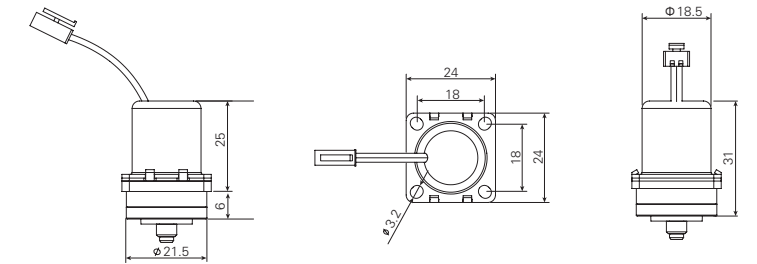

Model: XQ-20A




外形尺寸图Size of installation

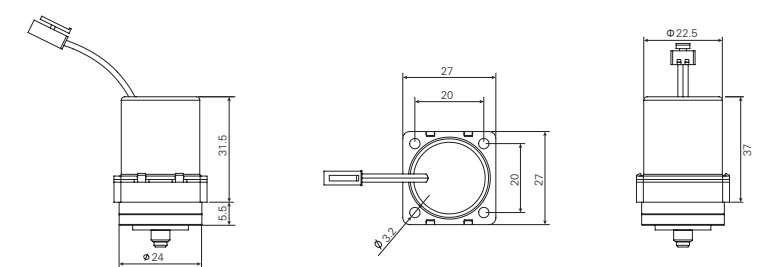

Model: XQ-20B




外形尺寸图Size of installation

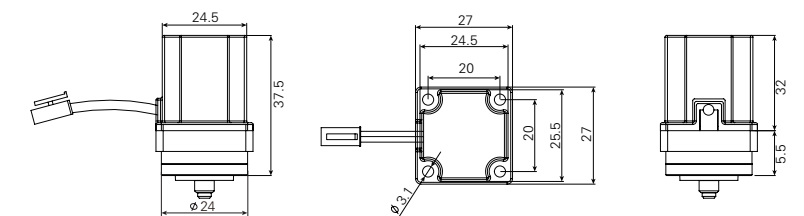

★ 压力与流量的关系


Relation between pressure and flow rate

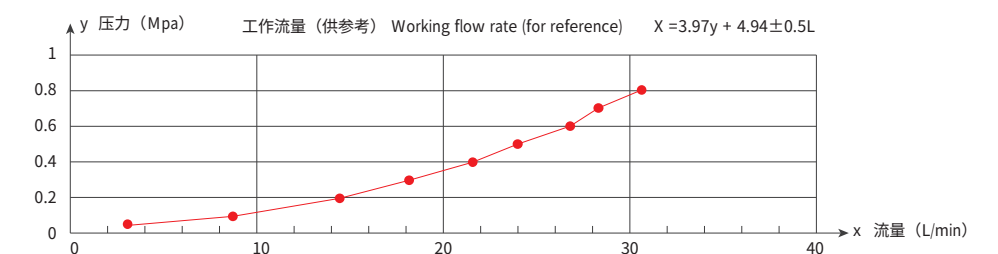

压力(MPa) Pressure (MPa)	0.05	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
流量平均值(KG/min) Average flow rare(KG/min)	3.2	8.8	14.5	18.2	21.6	24	26.8	28.3	30.6


Model: XQ-21

外形尺寸图Size of installation

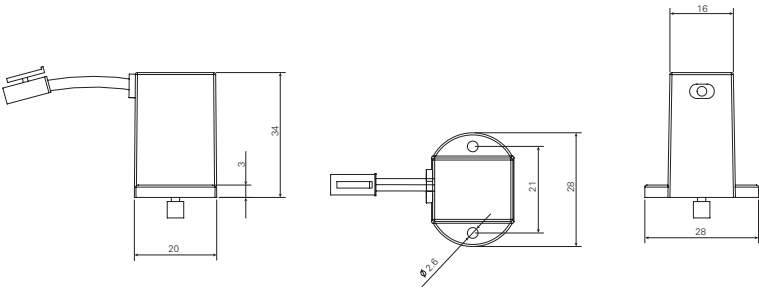


Model: XQ-26

外形尺寸图Size of installation

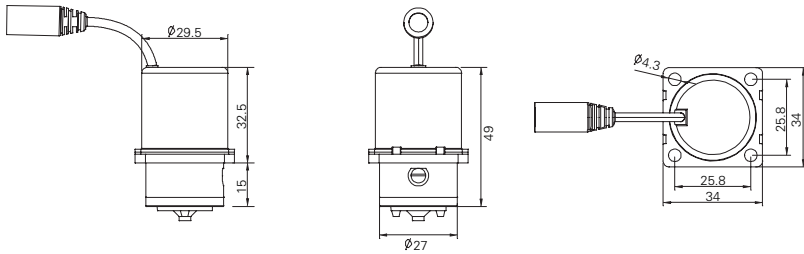



Model: XQ-30

外形尺寸图Size of installation

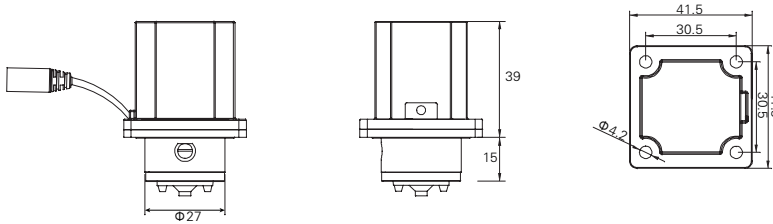



Model: CK-A

外形尺寸图Size of installation

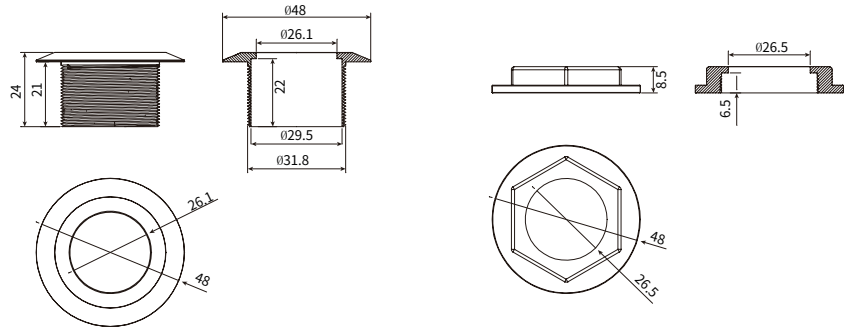

Model: CK-B

外形尺寸图Size of installation

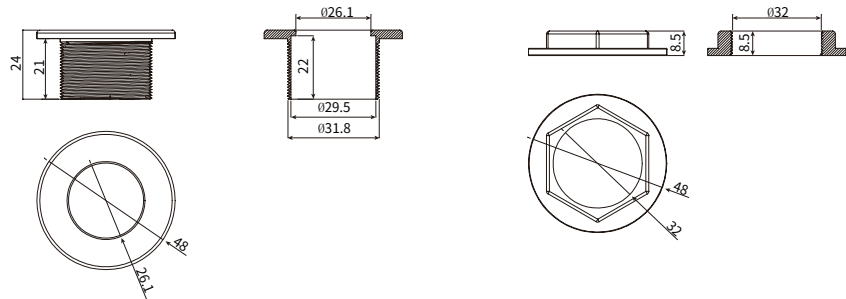

Model: CK-C

外形尺寸图Size of installation

